


Lumitrix Urban Projection Mapping System


# Permanent Base 1.2



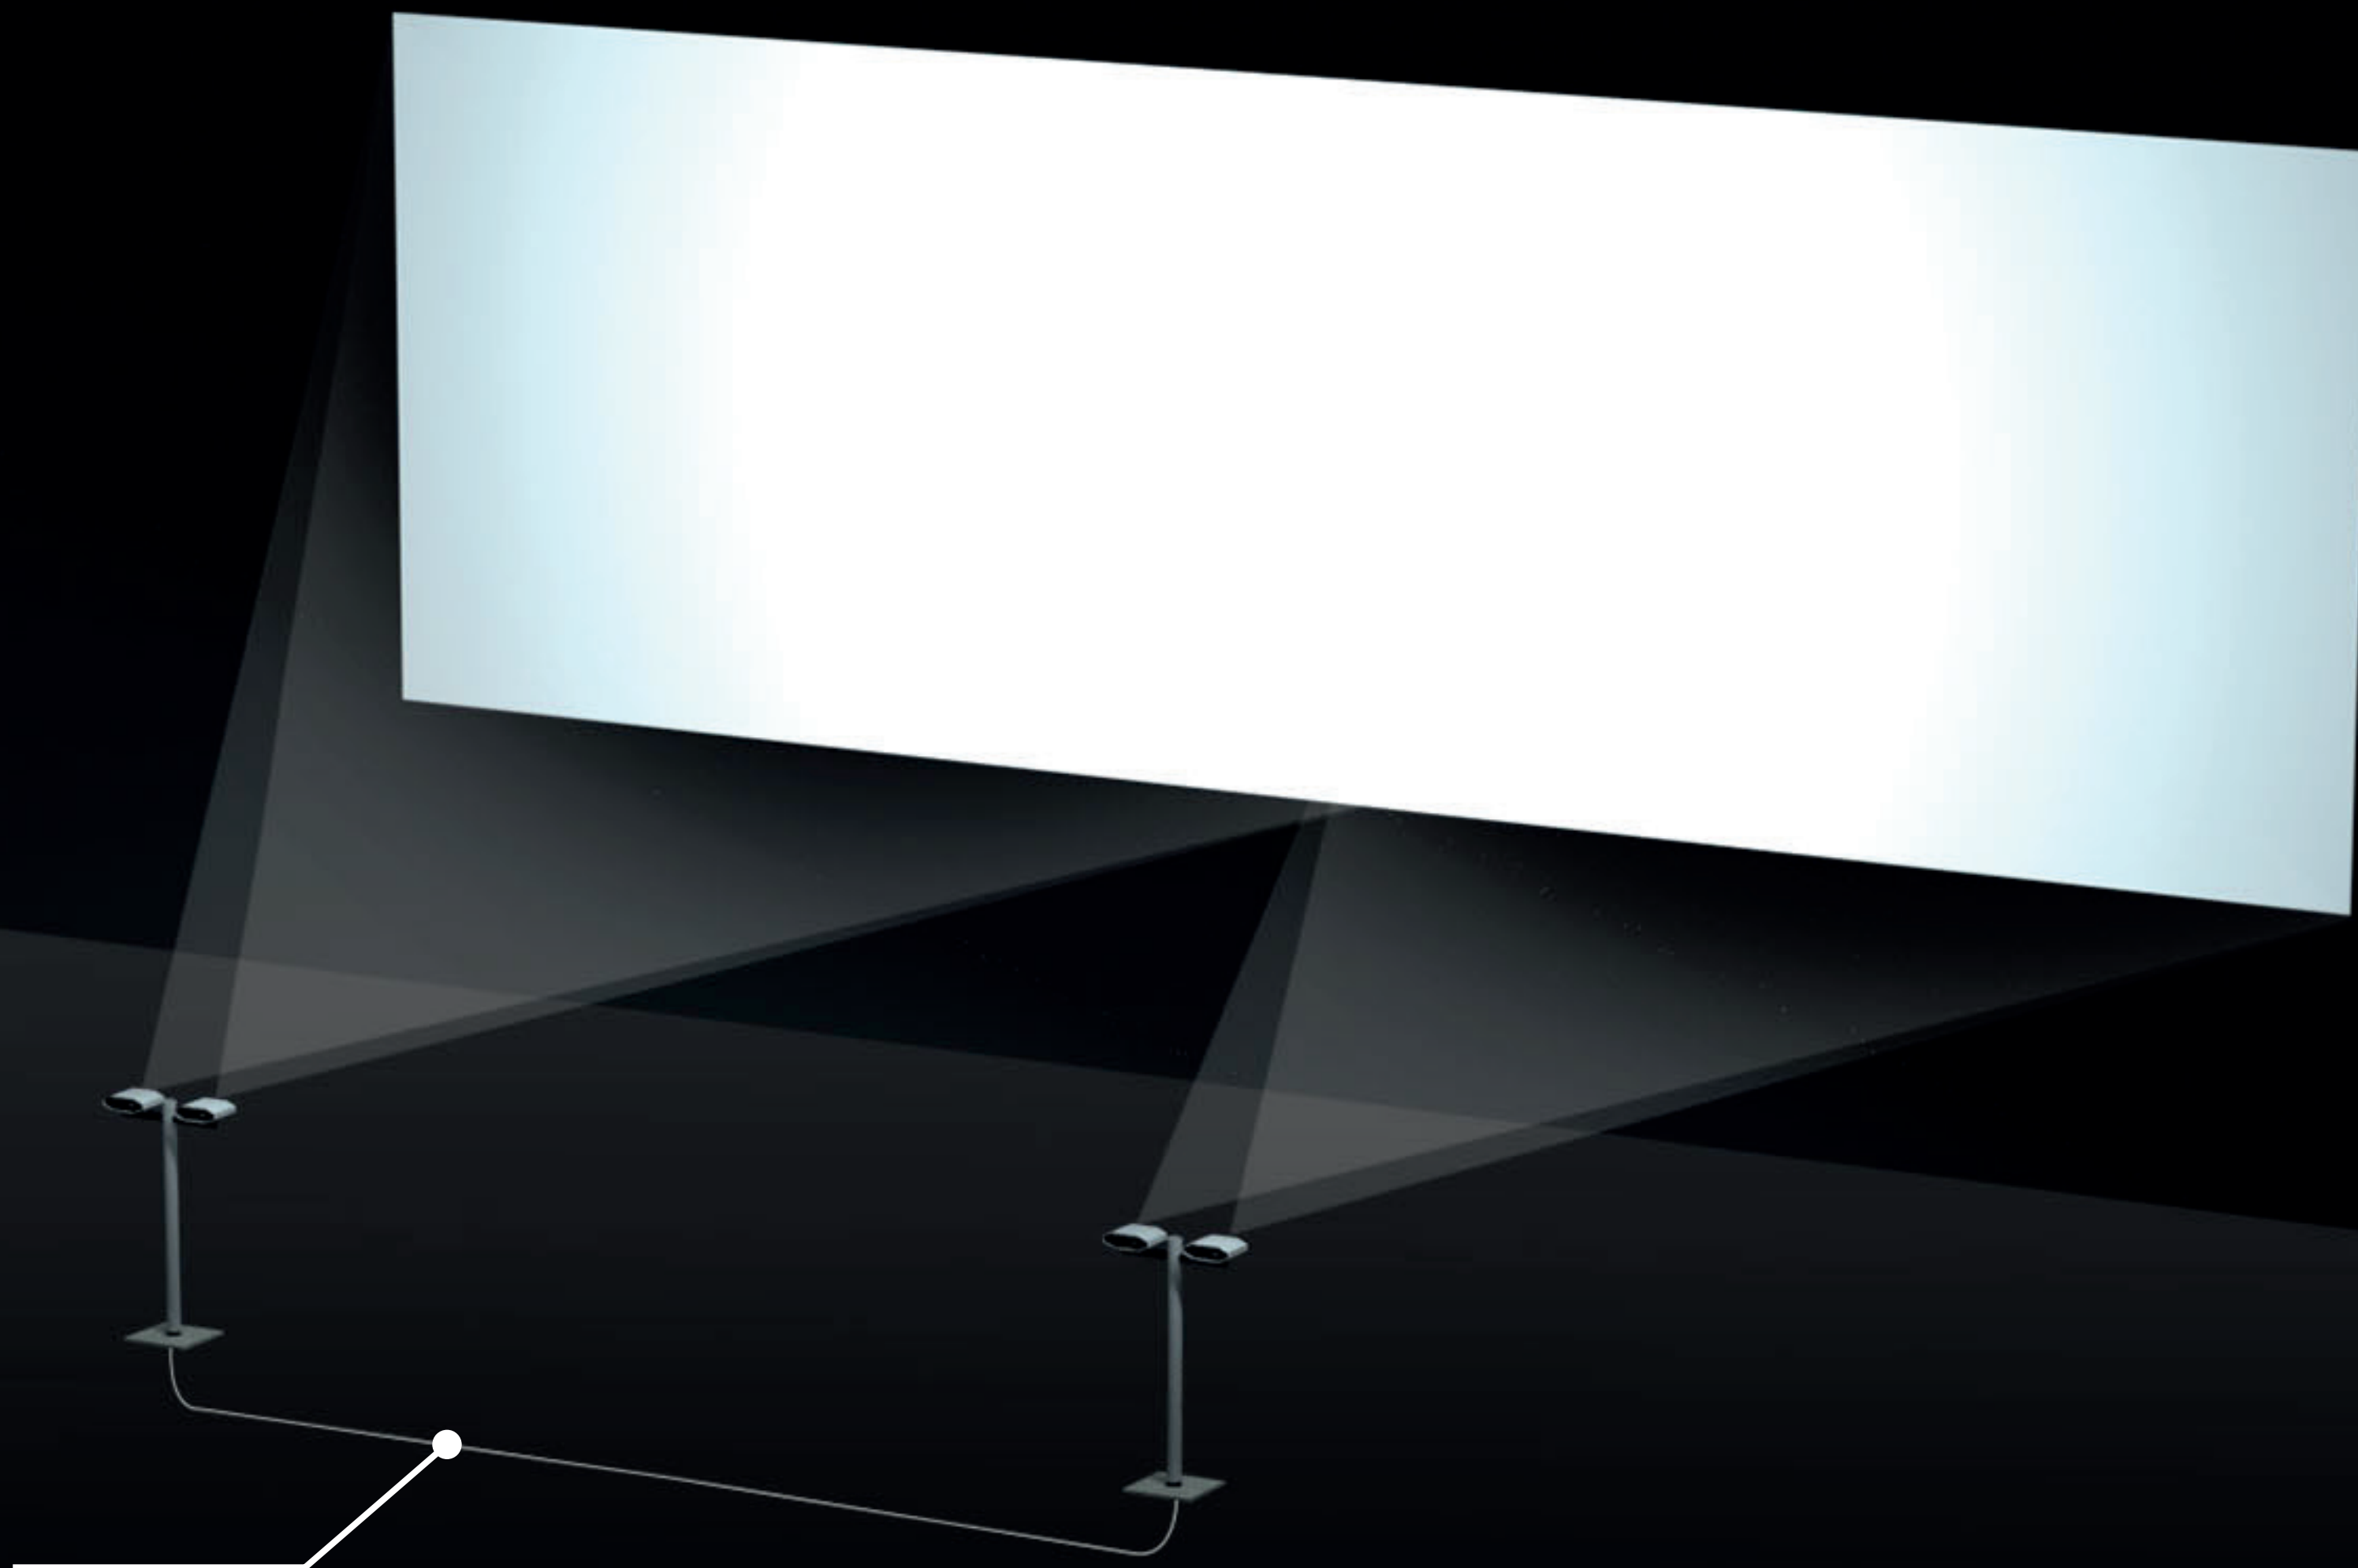

For the purpose of image synchronization a LAN cable connecting all devices in the group has to be installed permanently. Required cable: FTP CAT 5 or better.

A


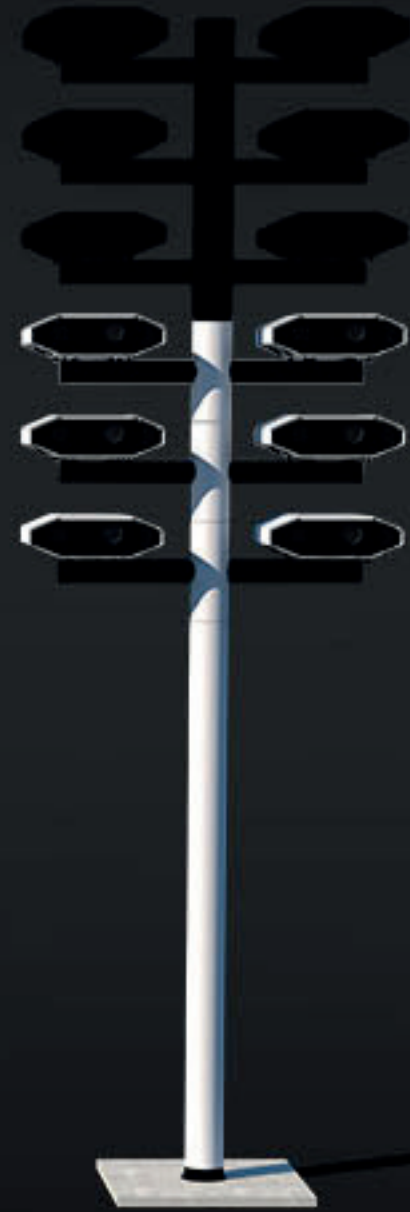


Max 3 rows / 6 projectors

B





Max 6 rows / 12 projectors

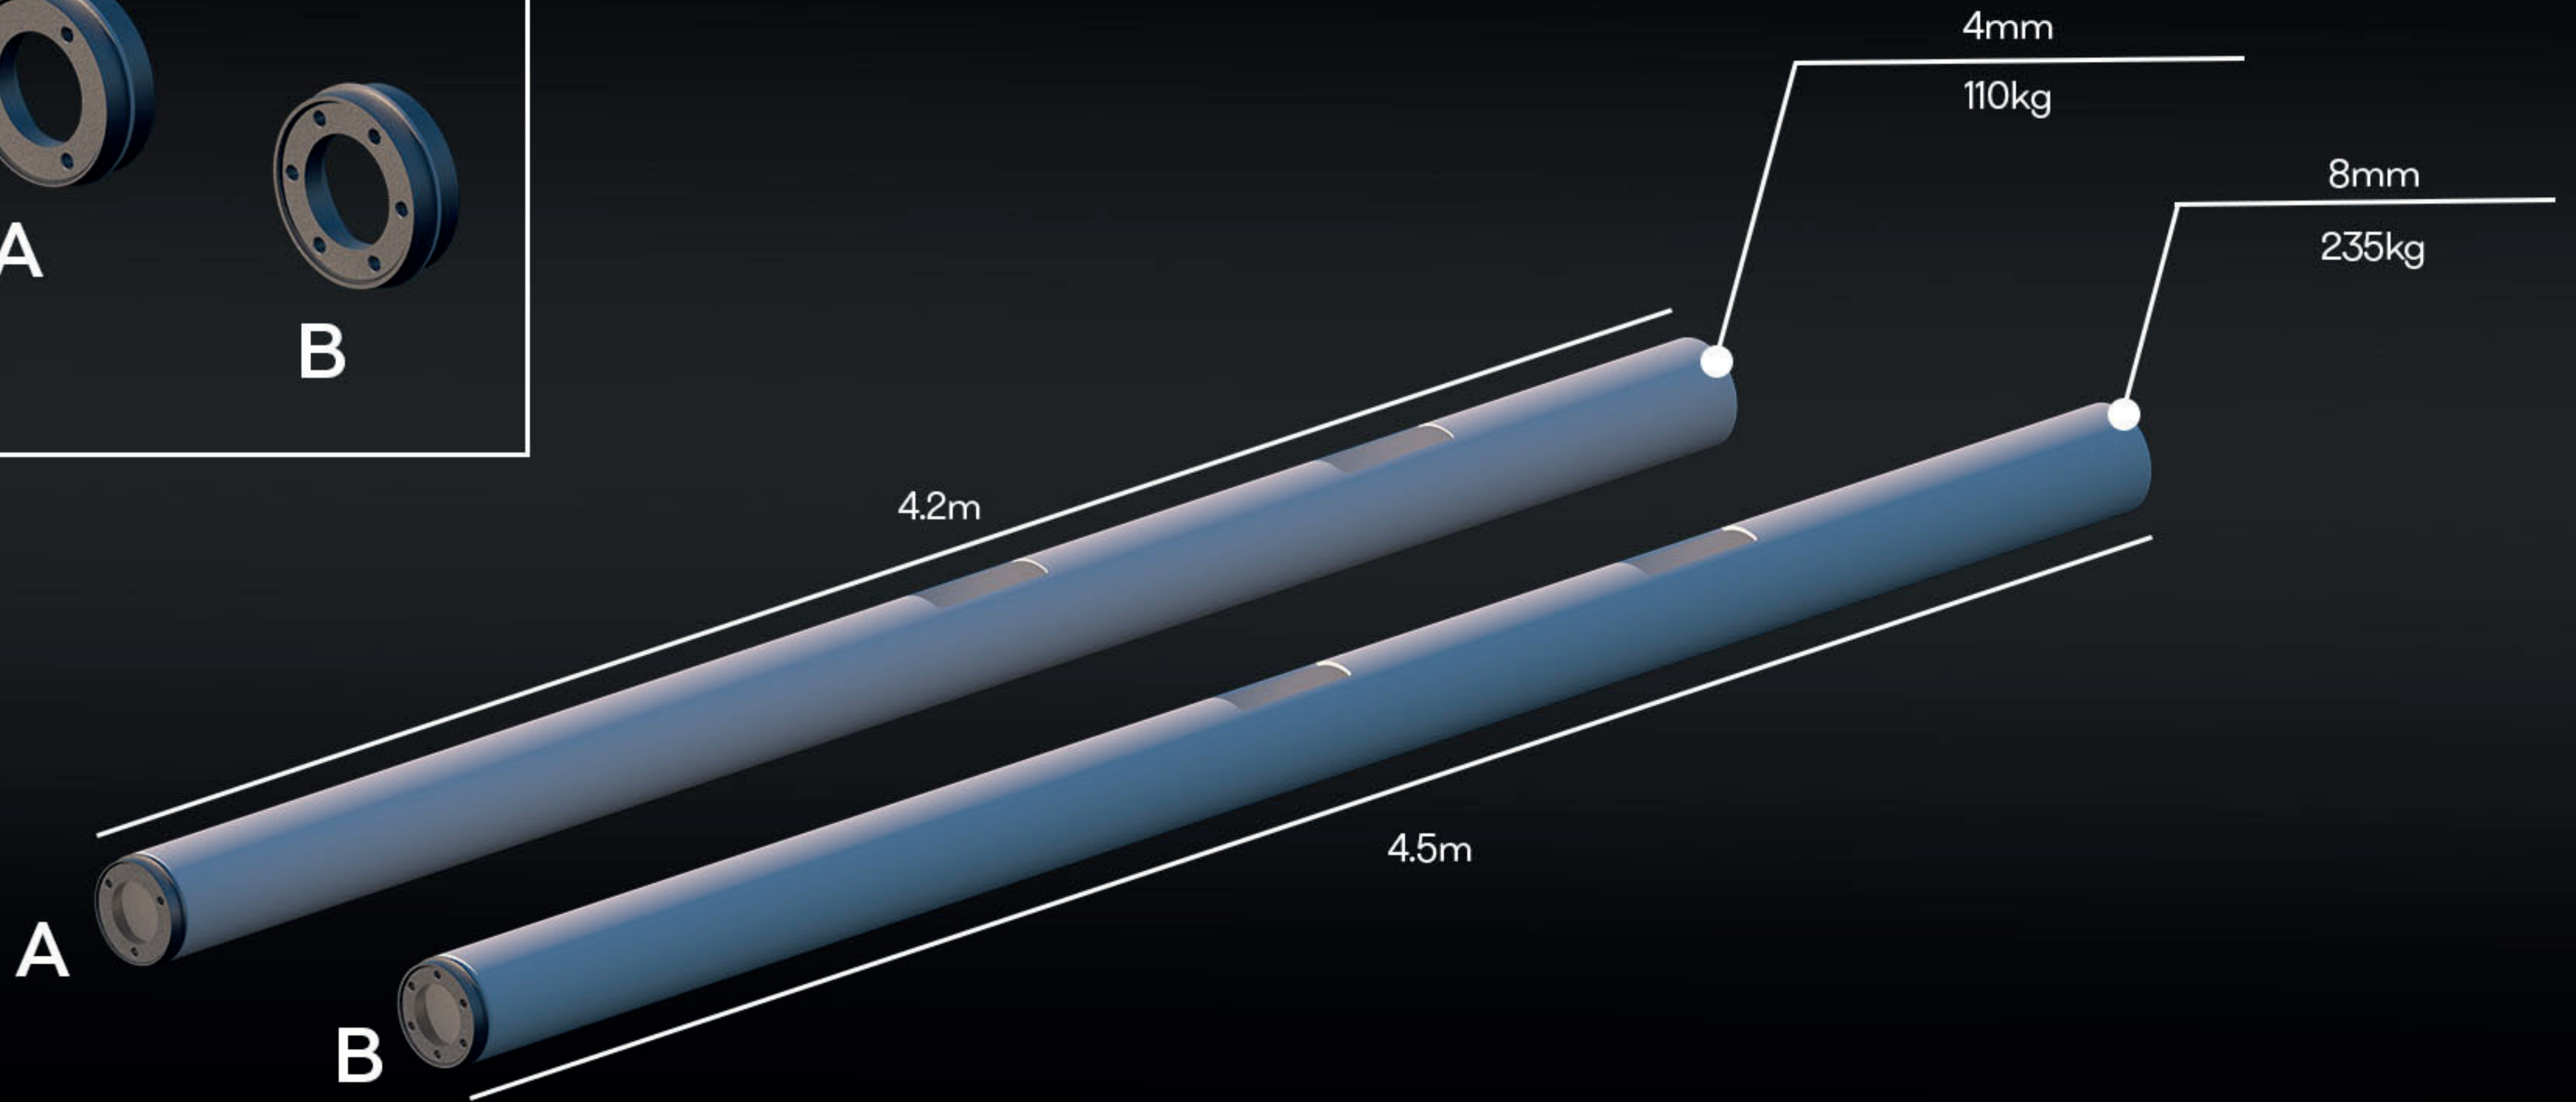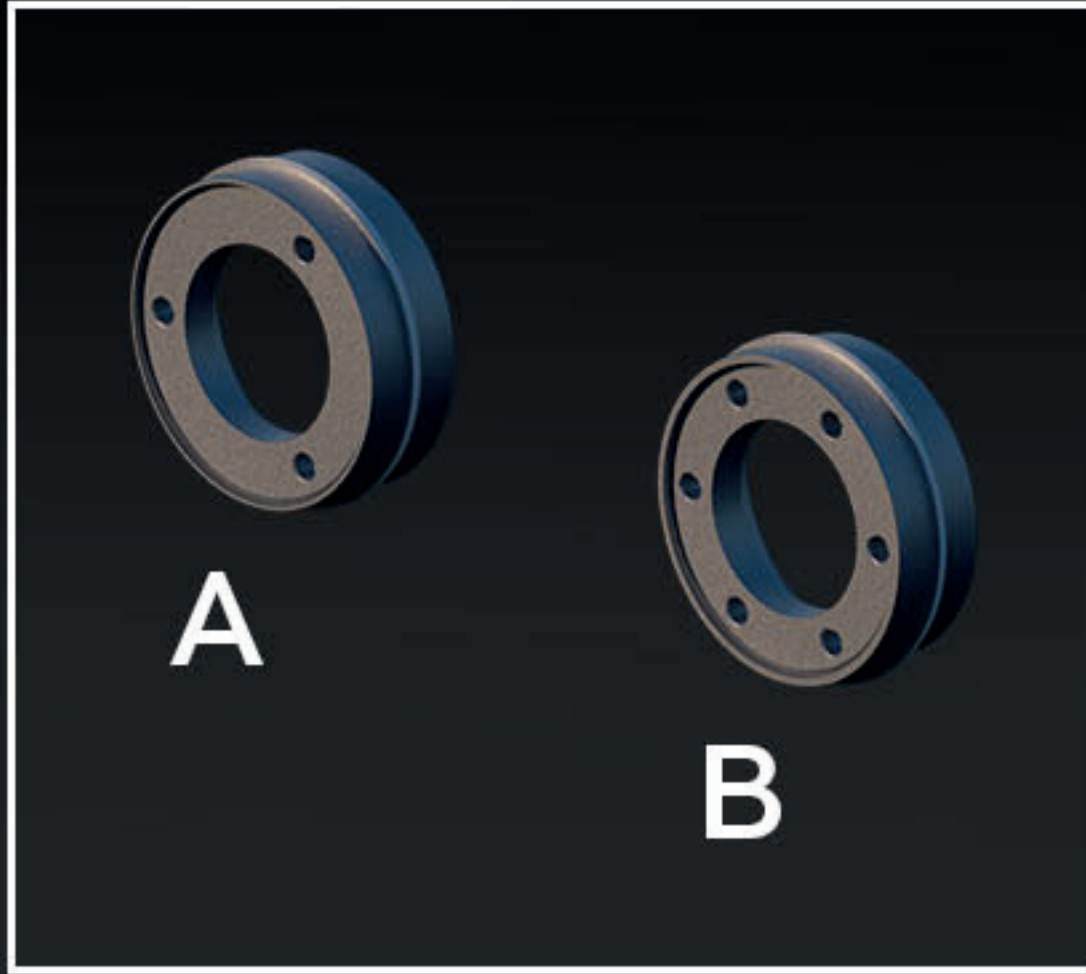


Main Column A or B



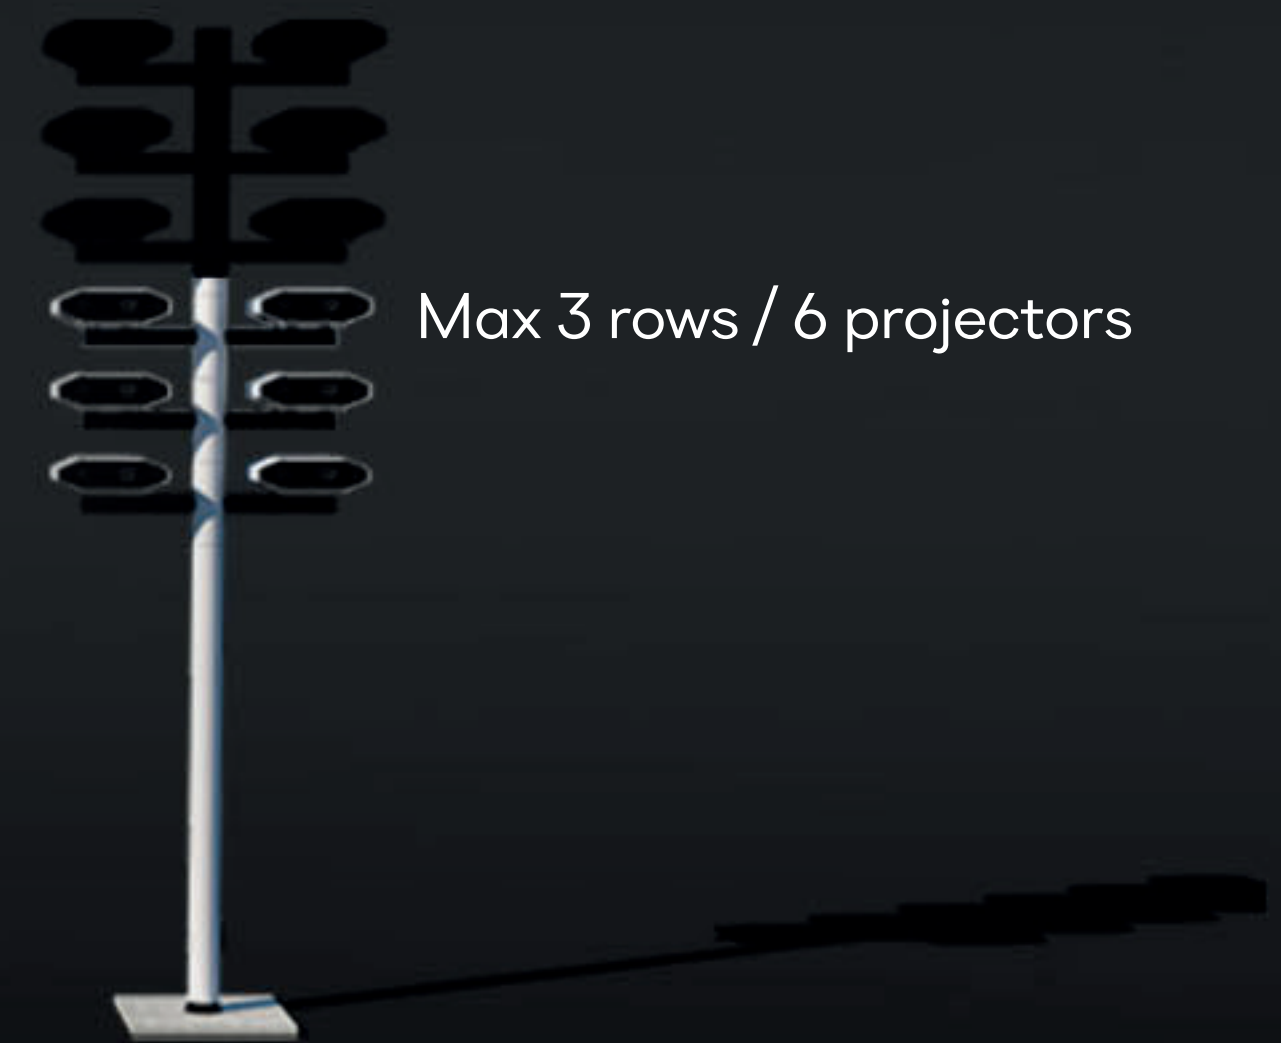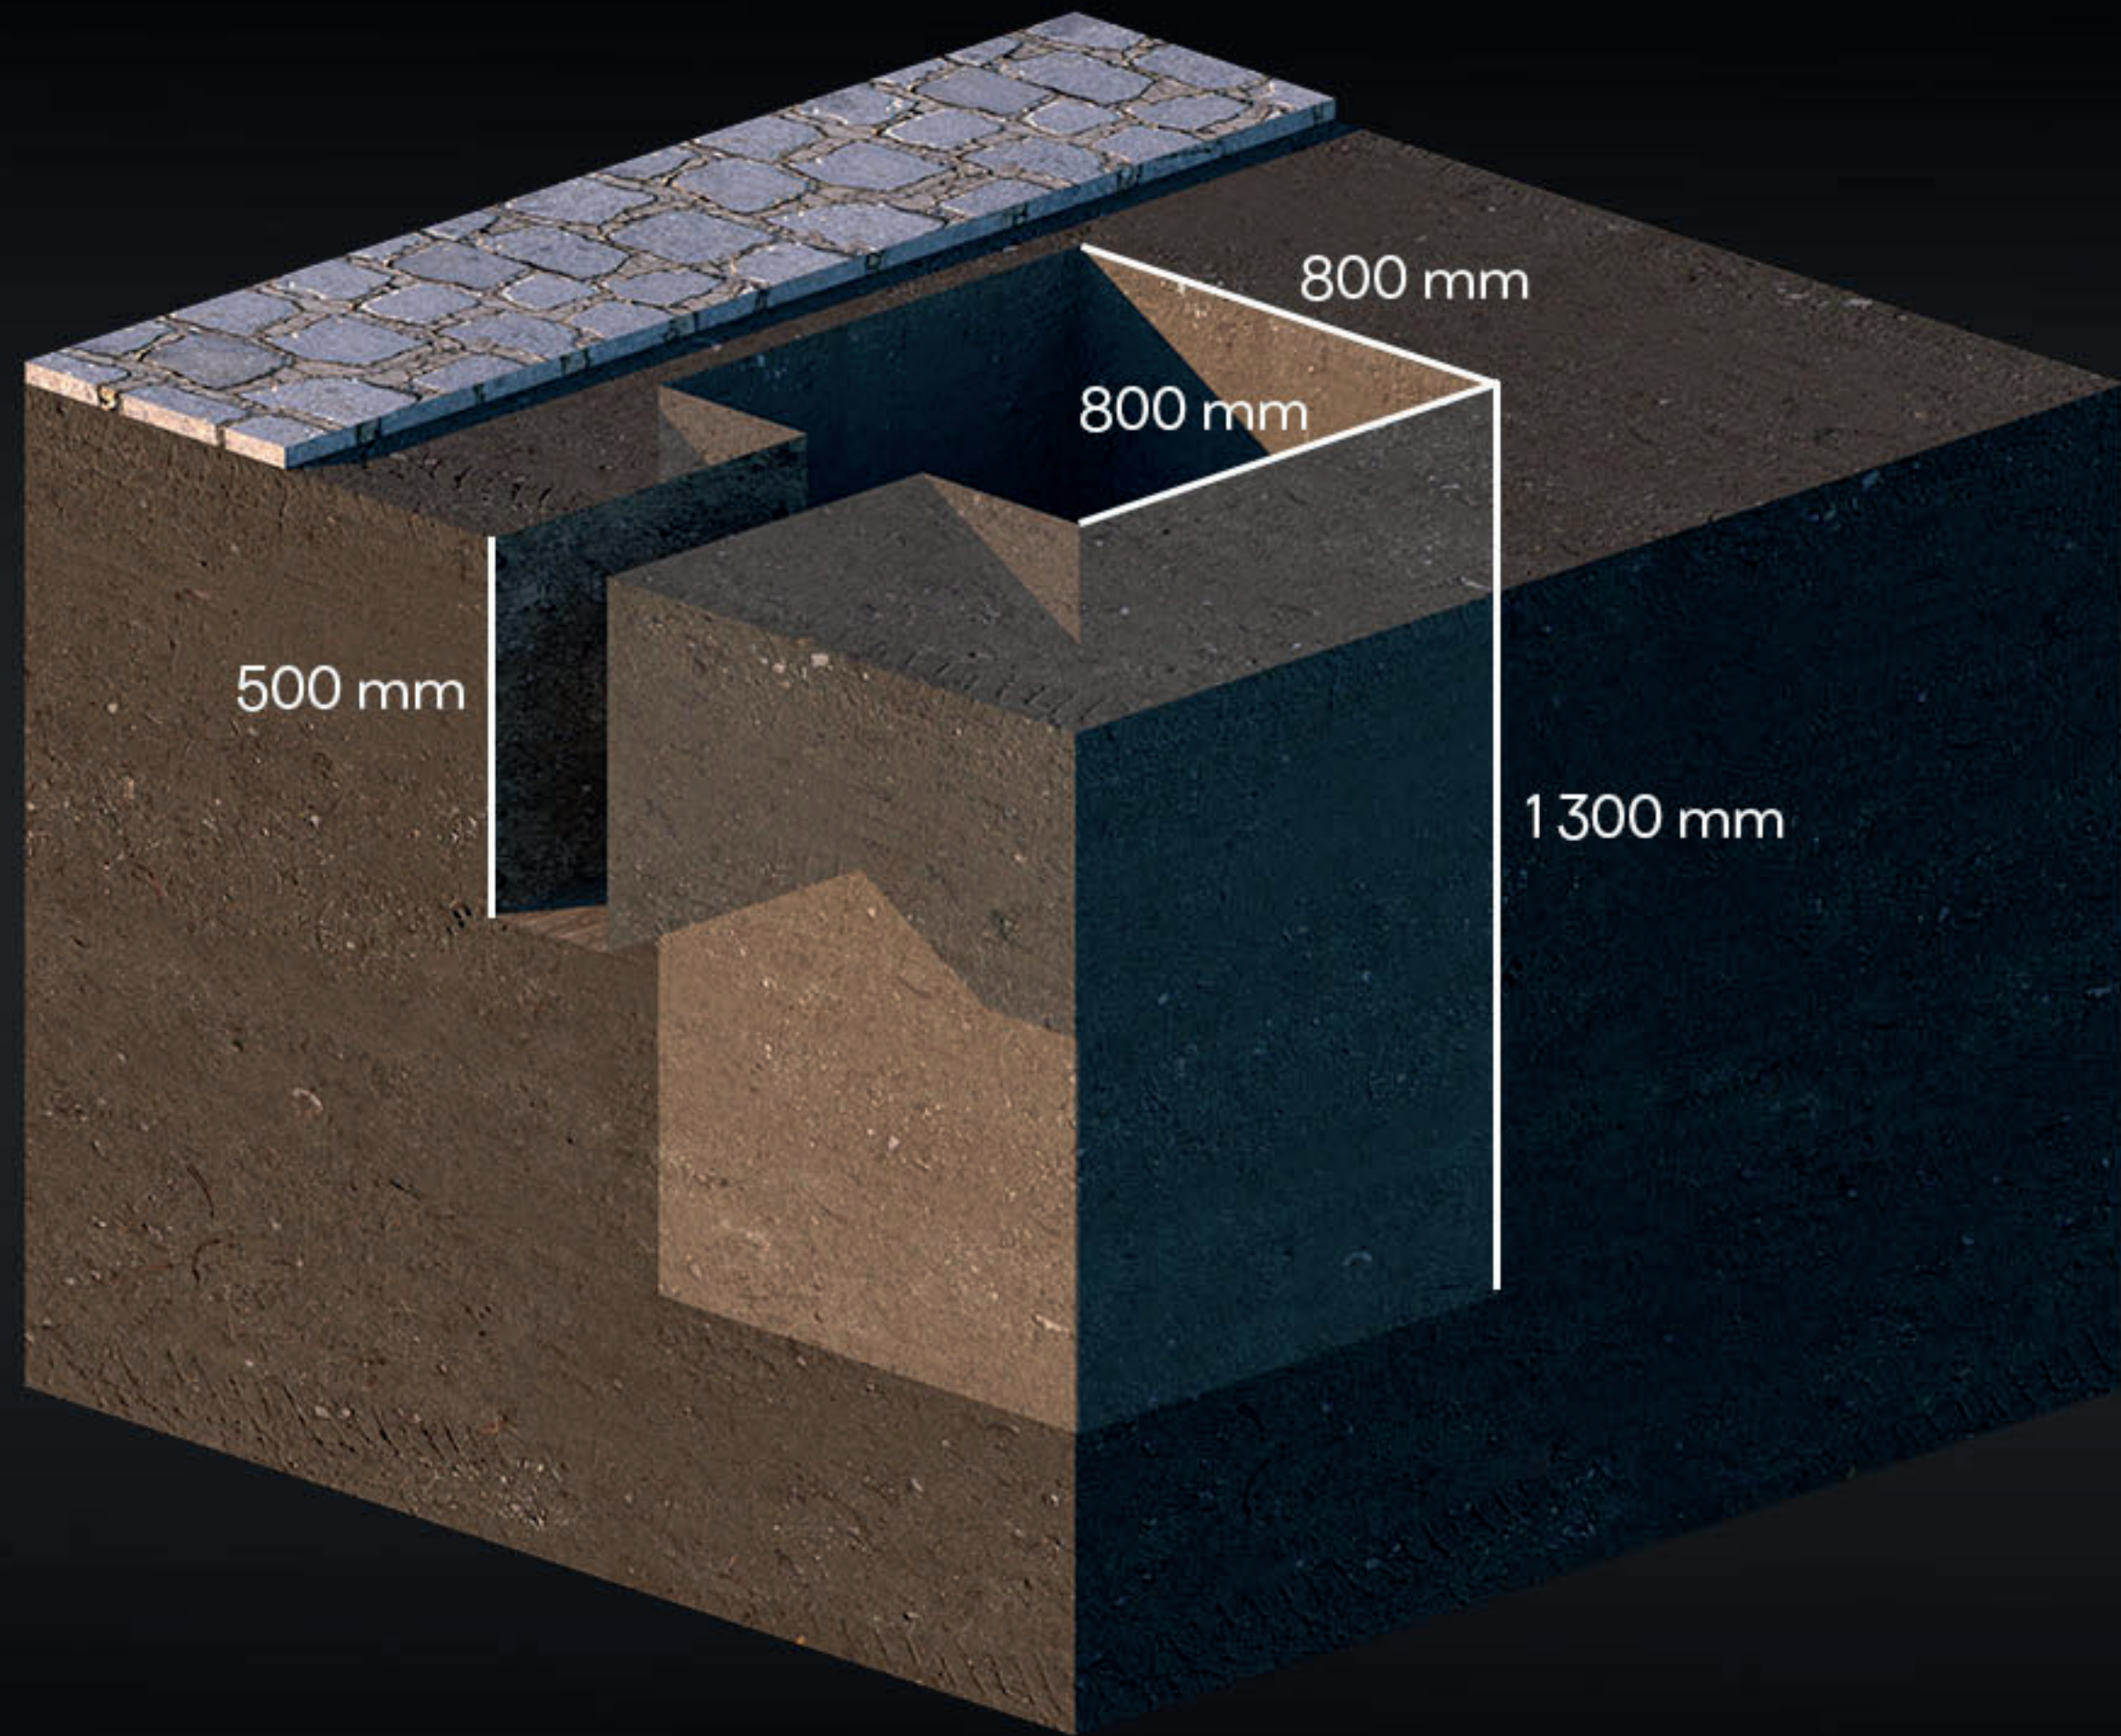


A



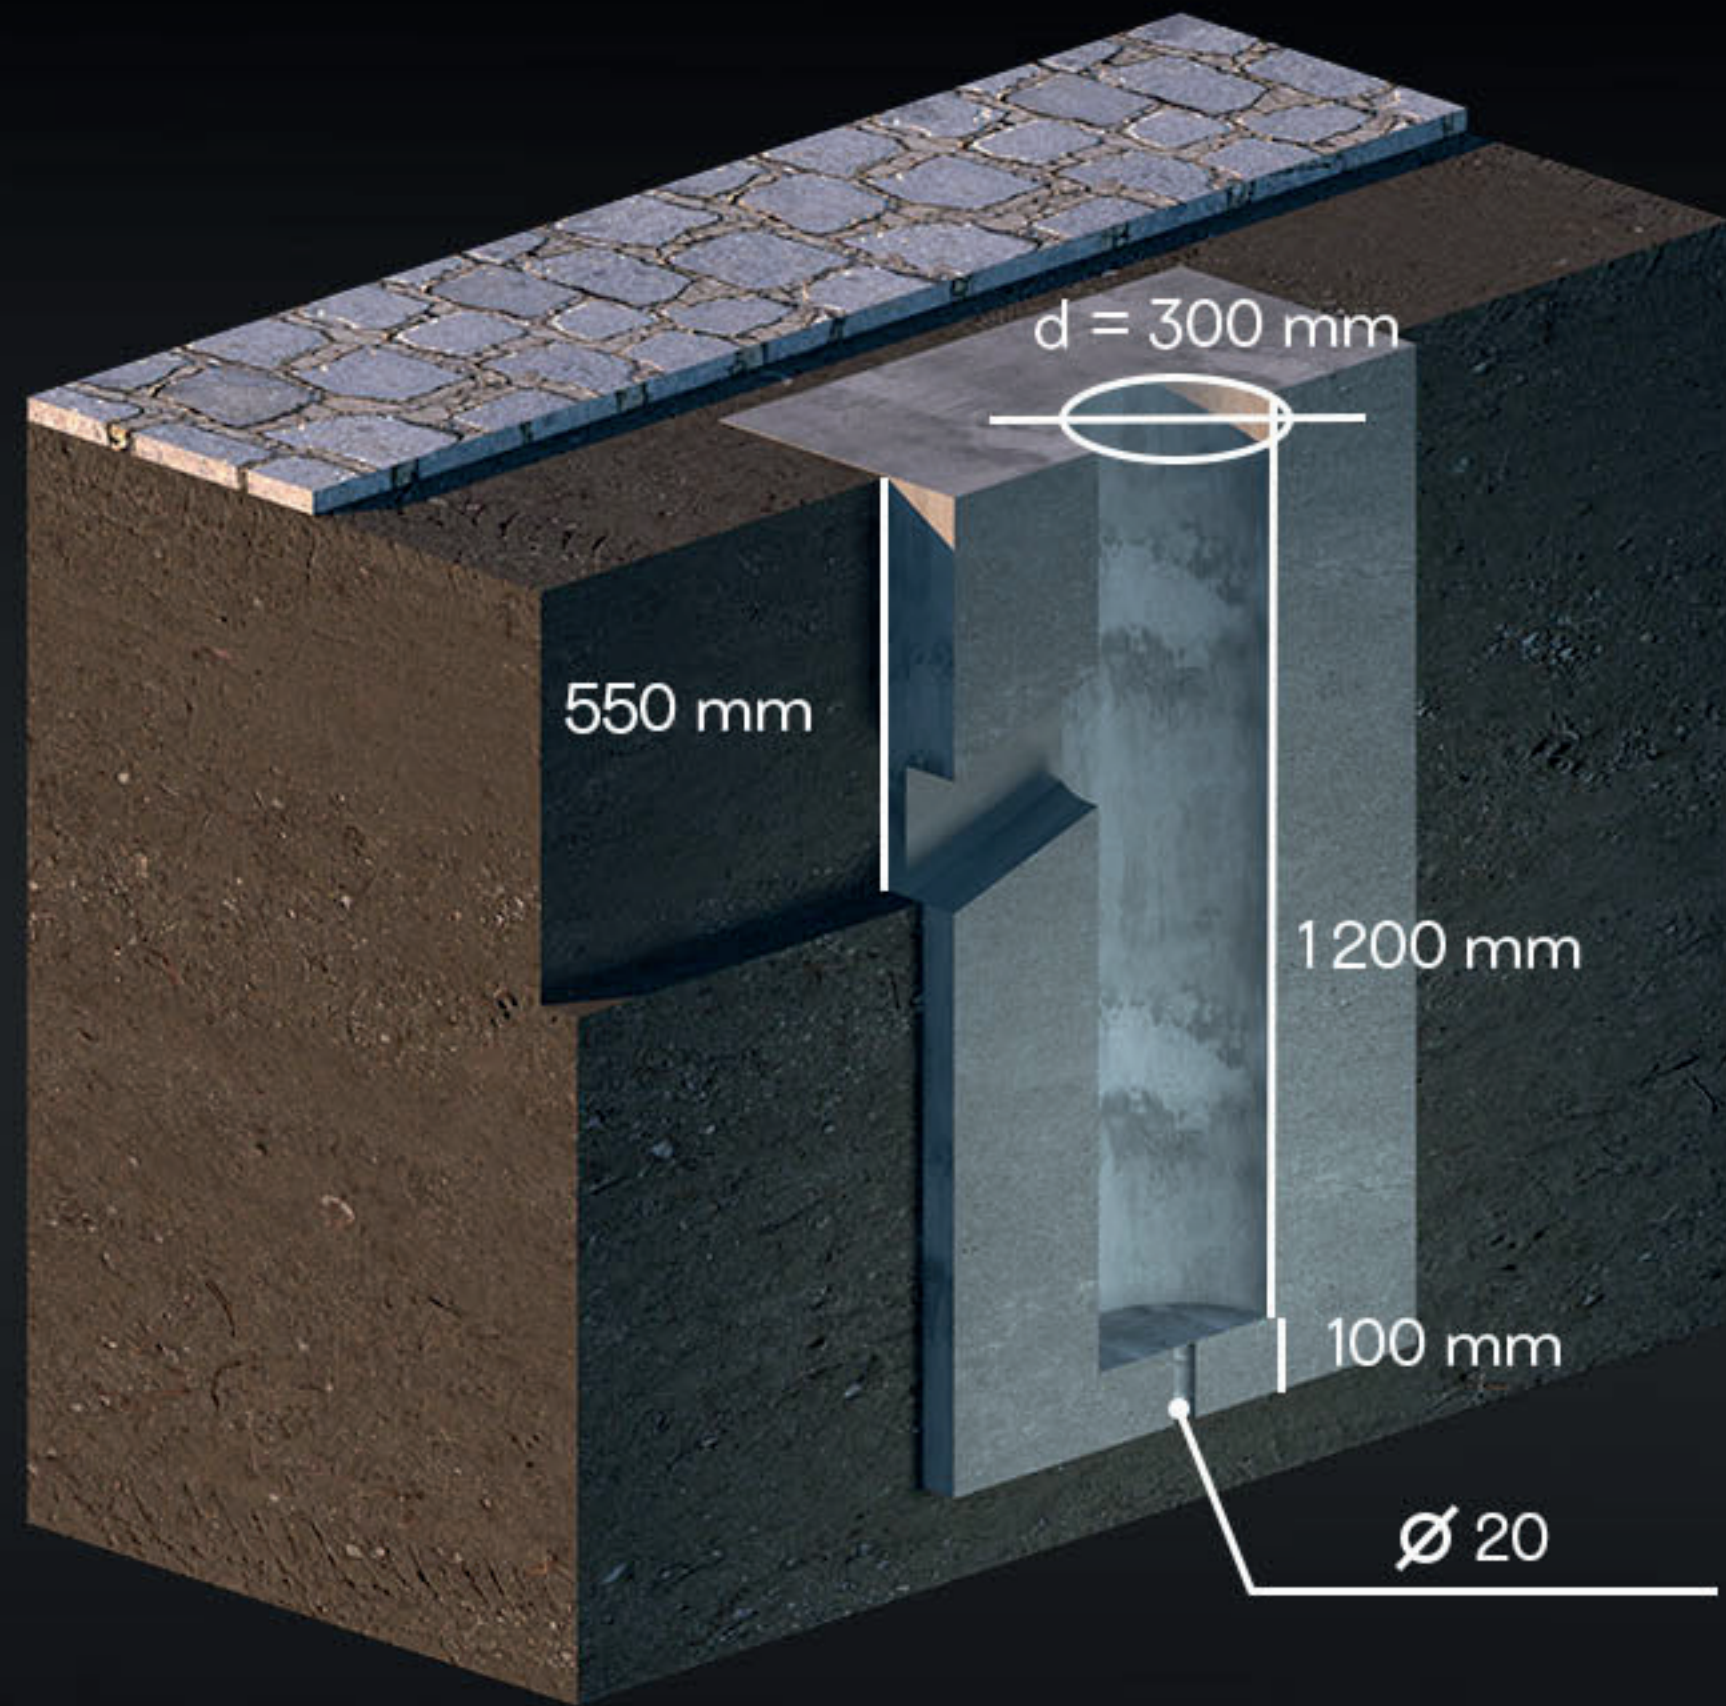




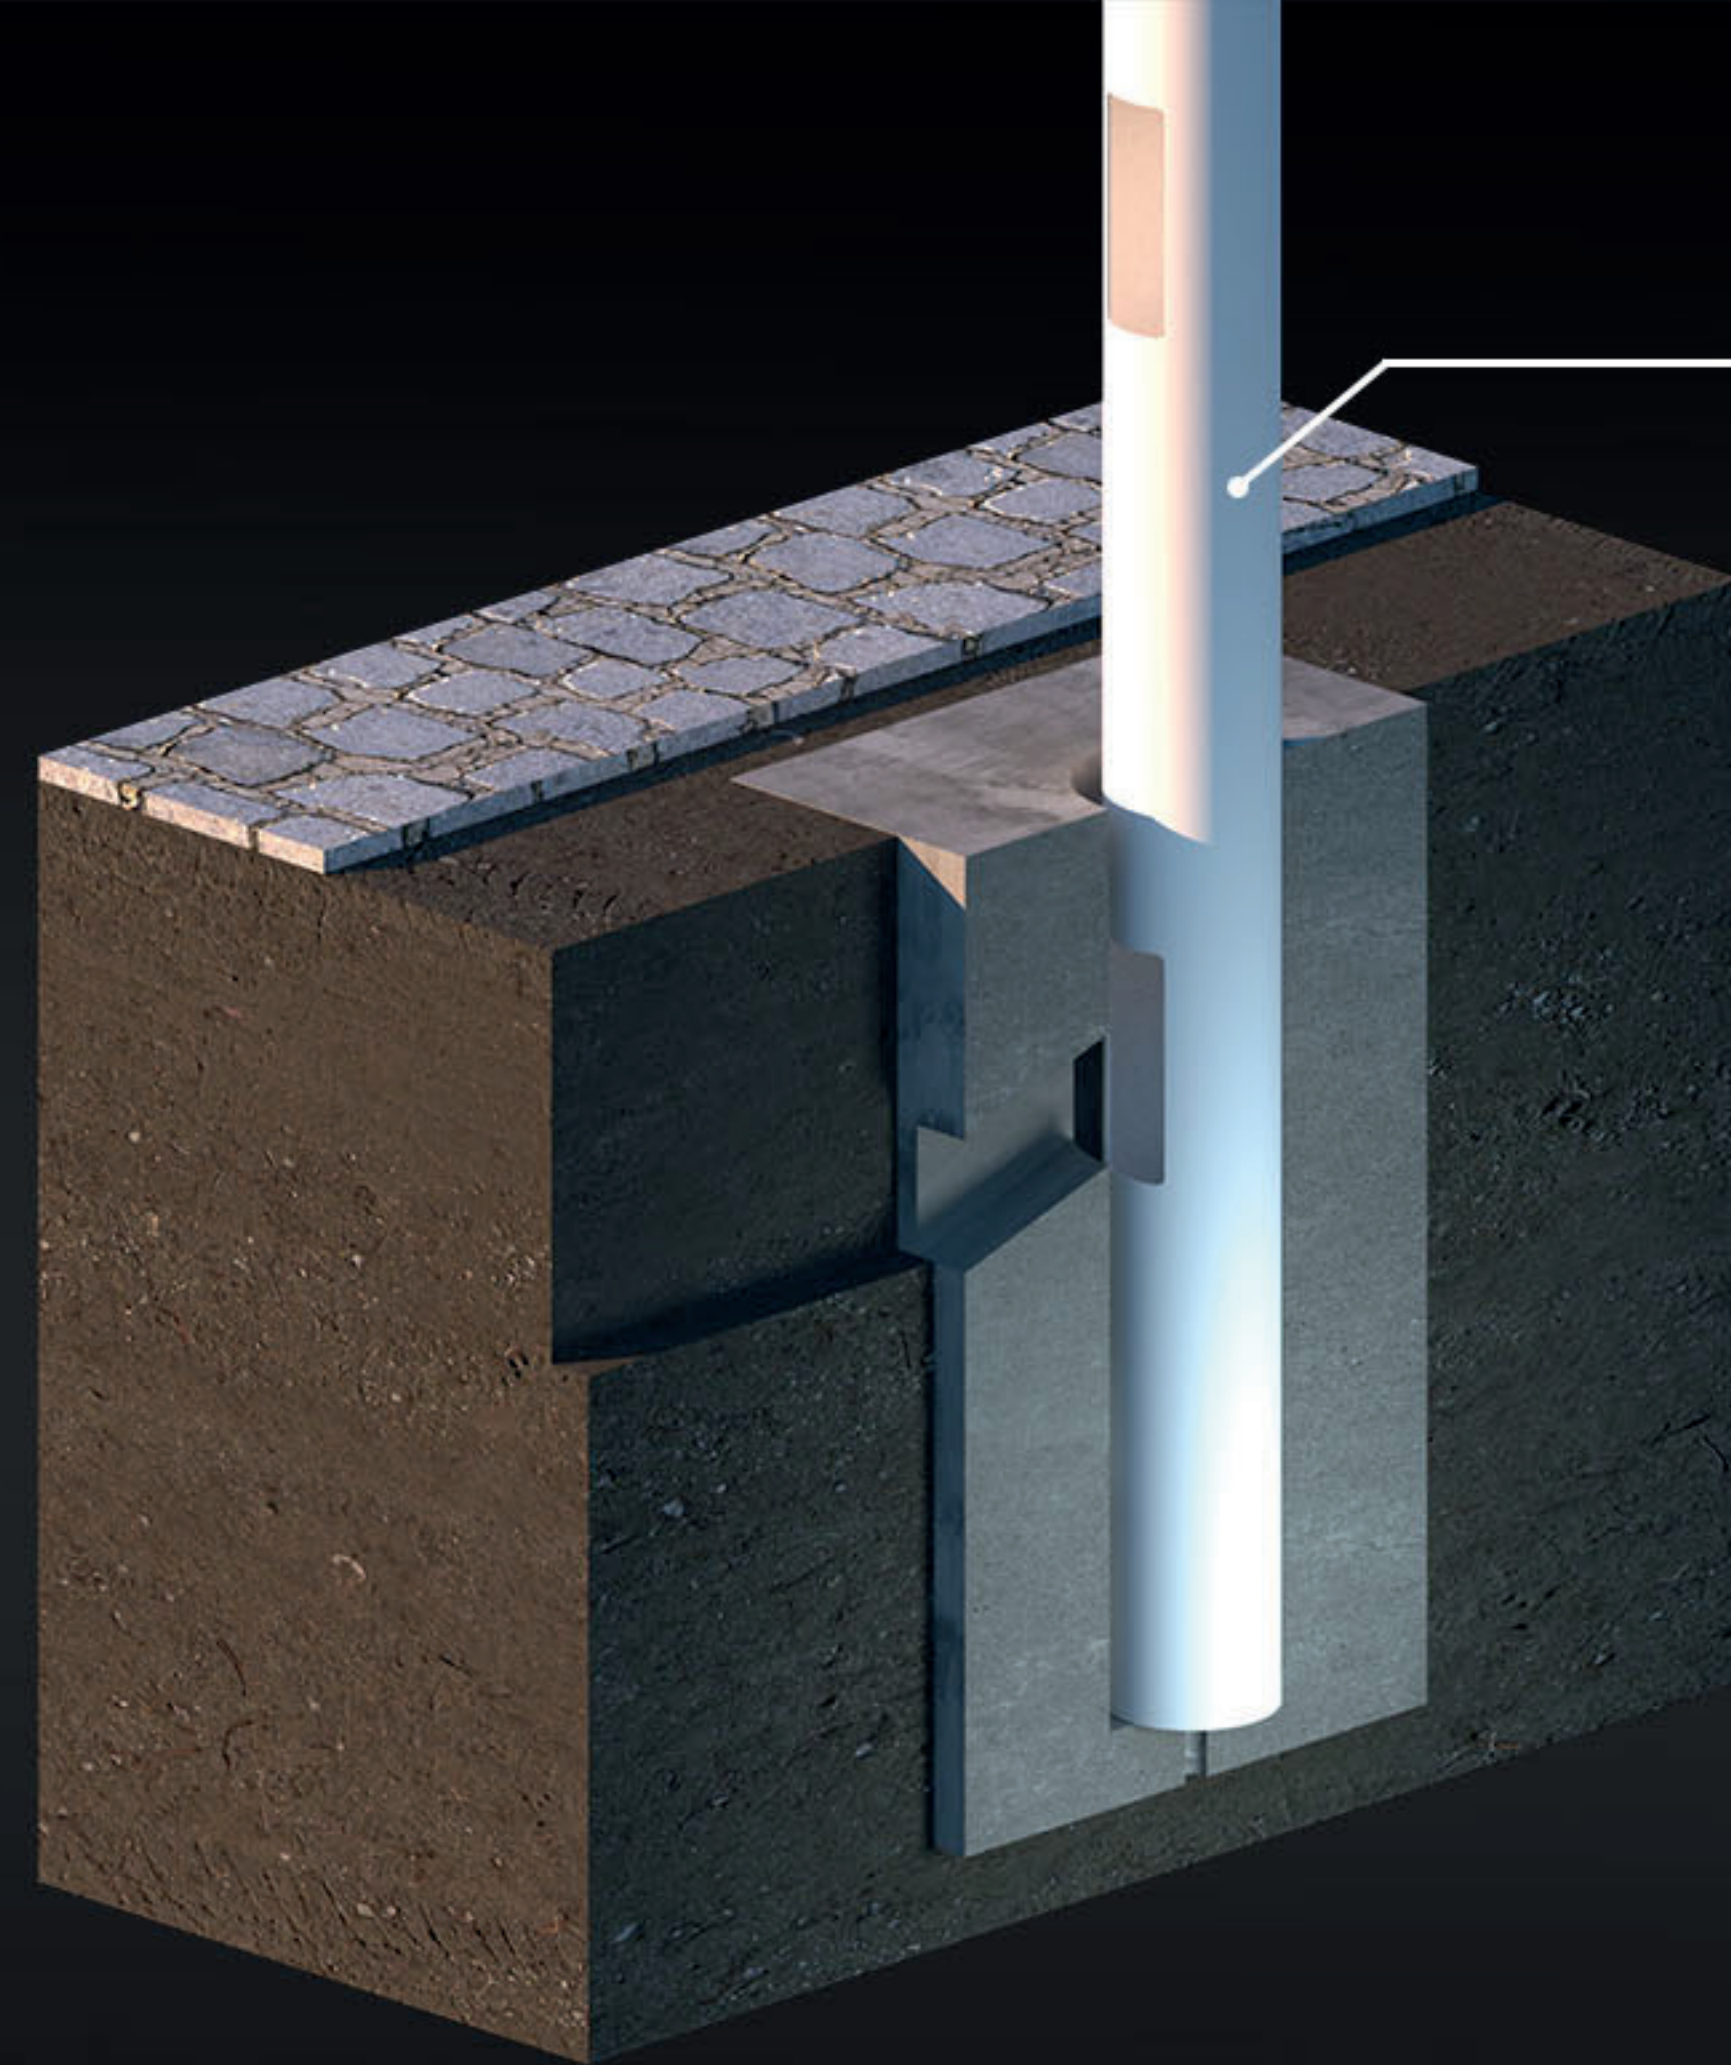

Main column A


Secure the post in perfectly vertical position with wooden pieces. Make sure the door is accessible for the underground cable insert.



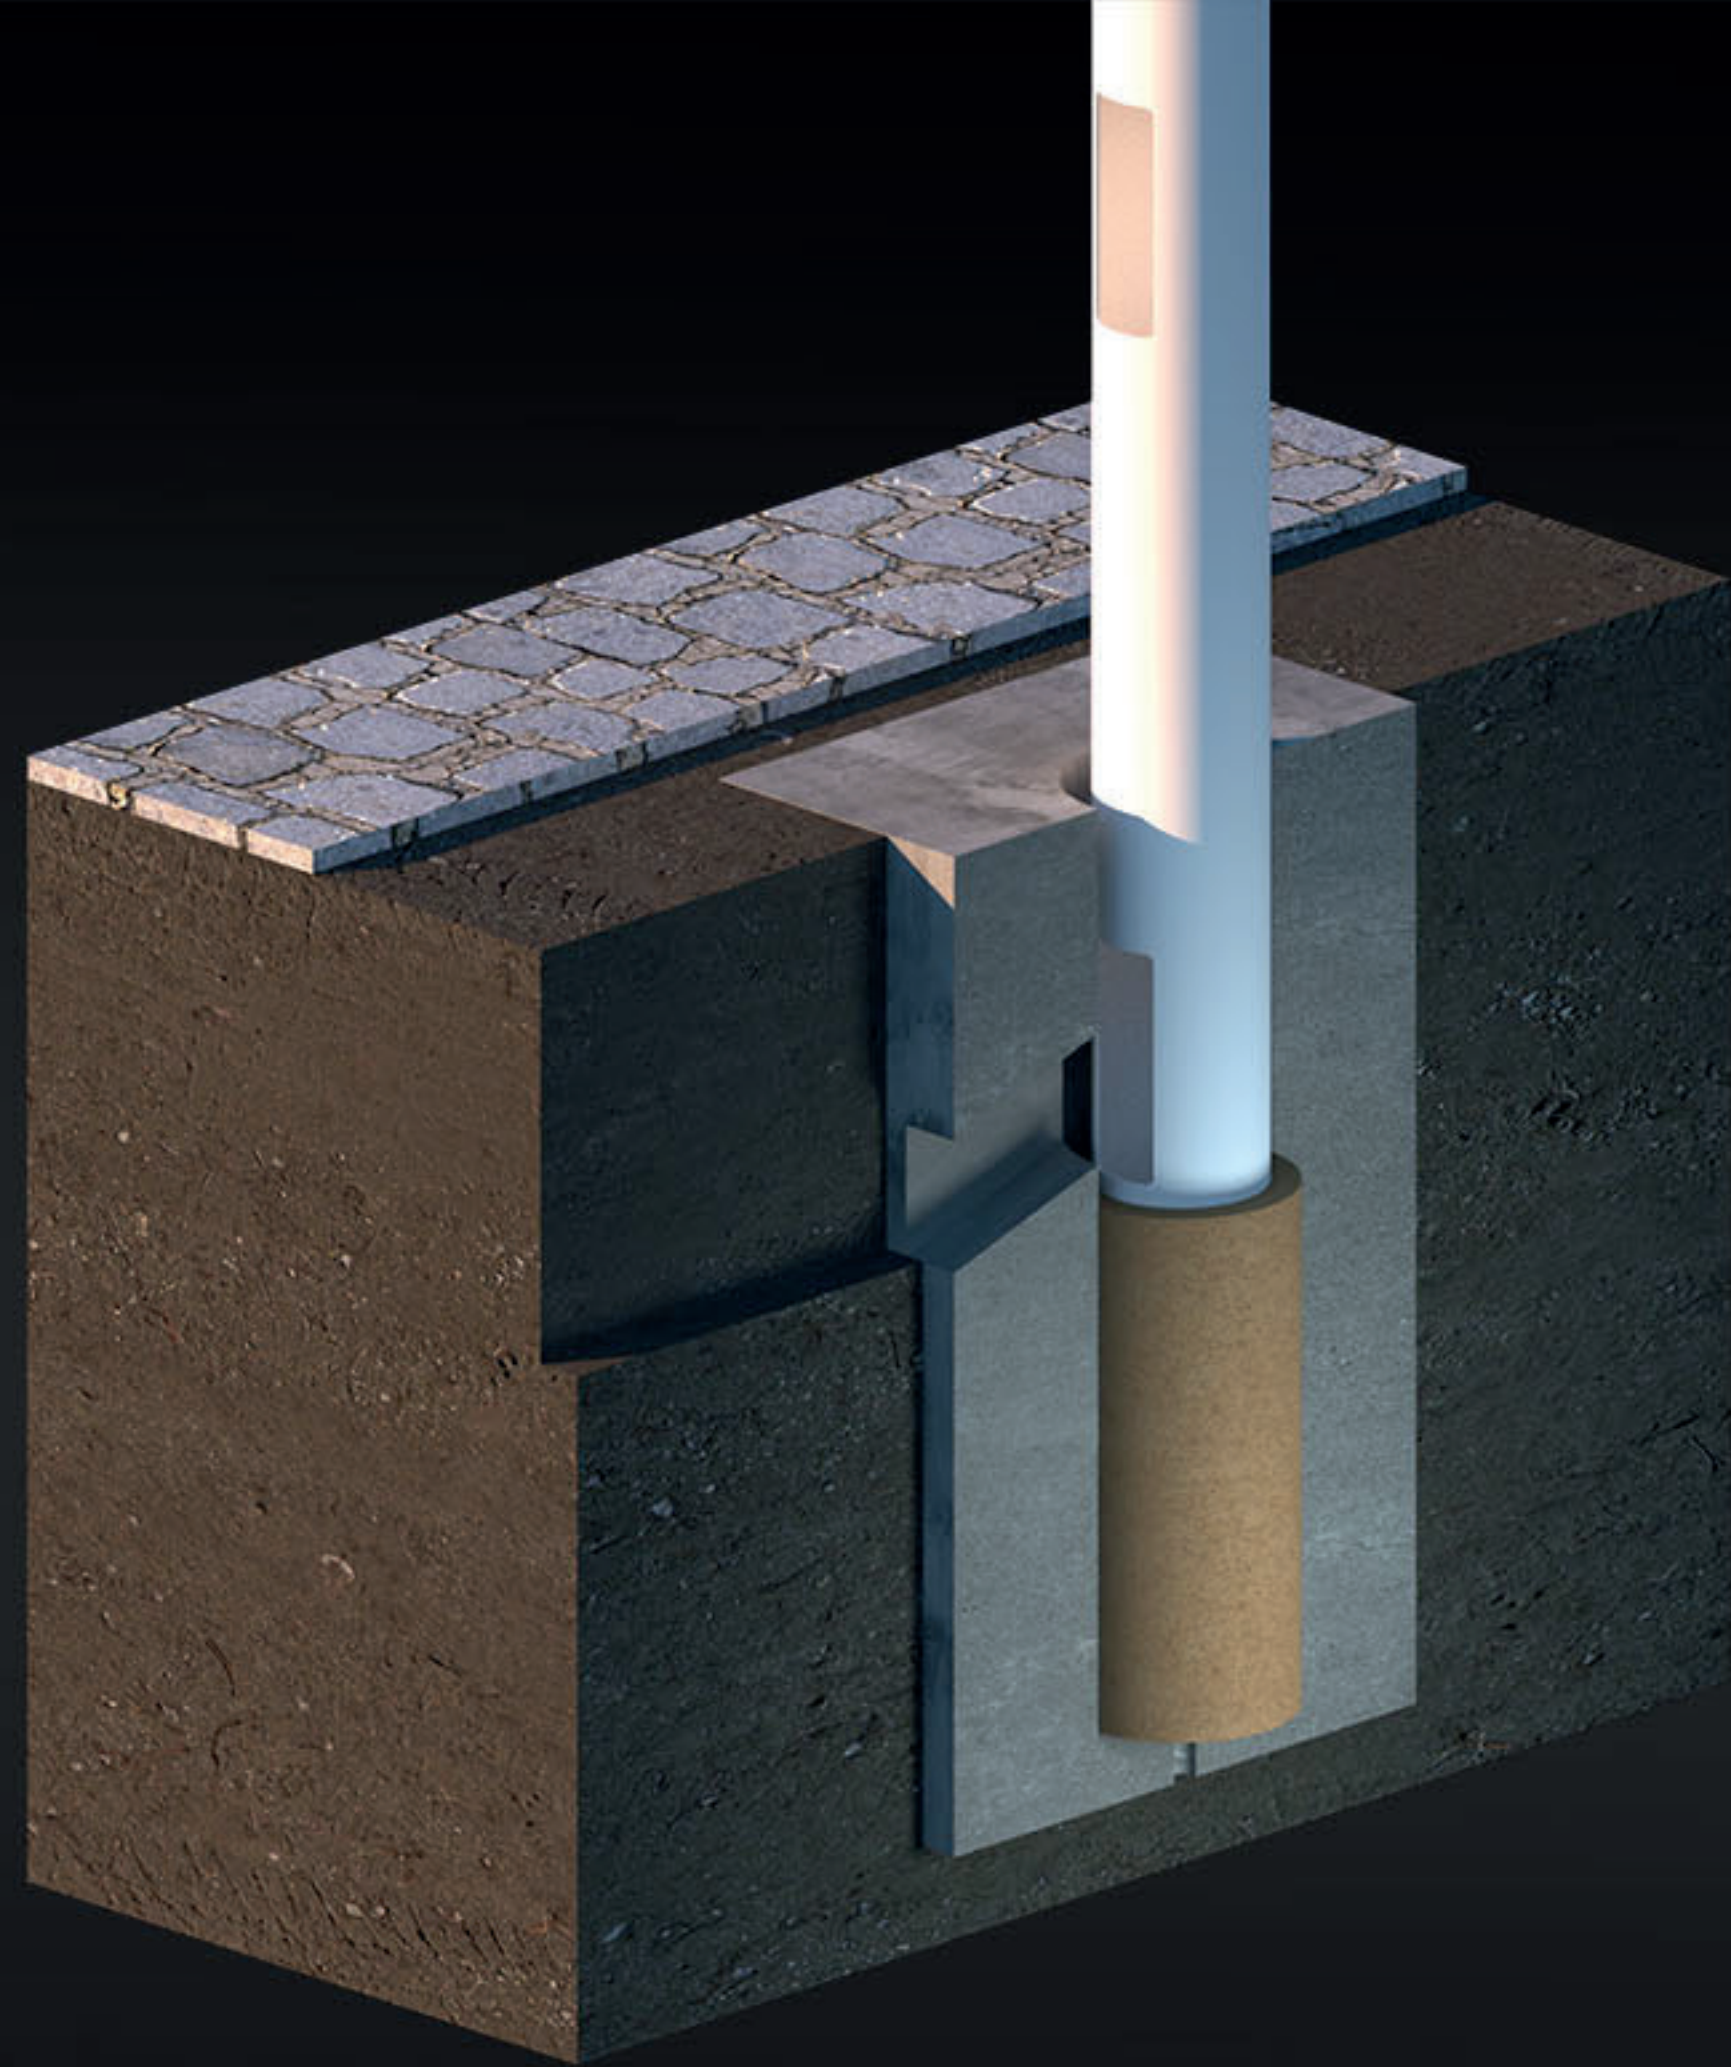


Thicken in fine sand. This will secure the Main Post in final position.



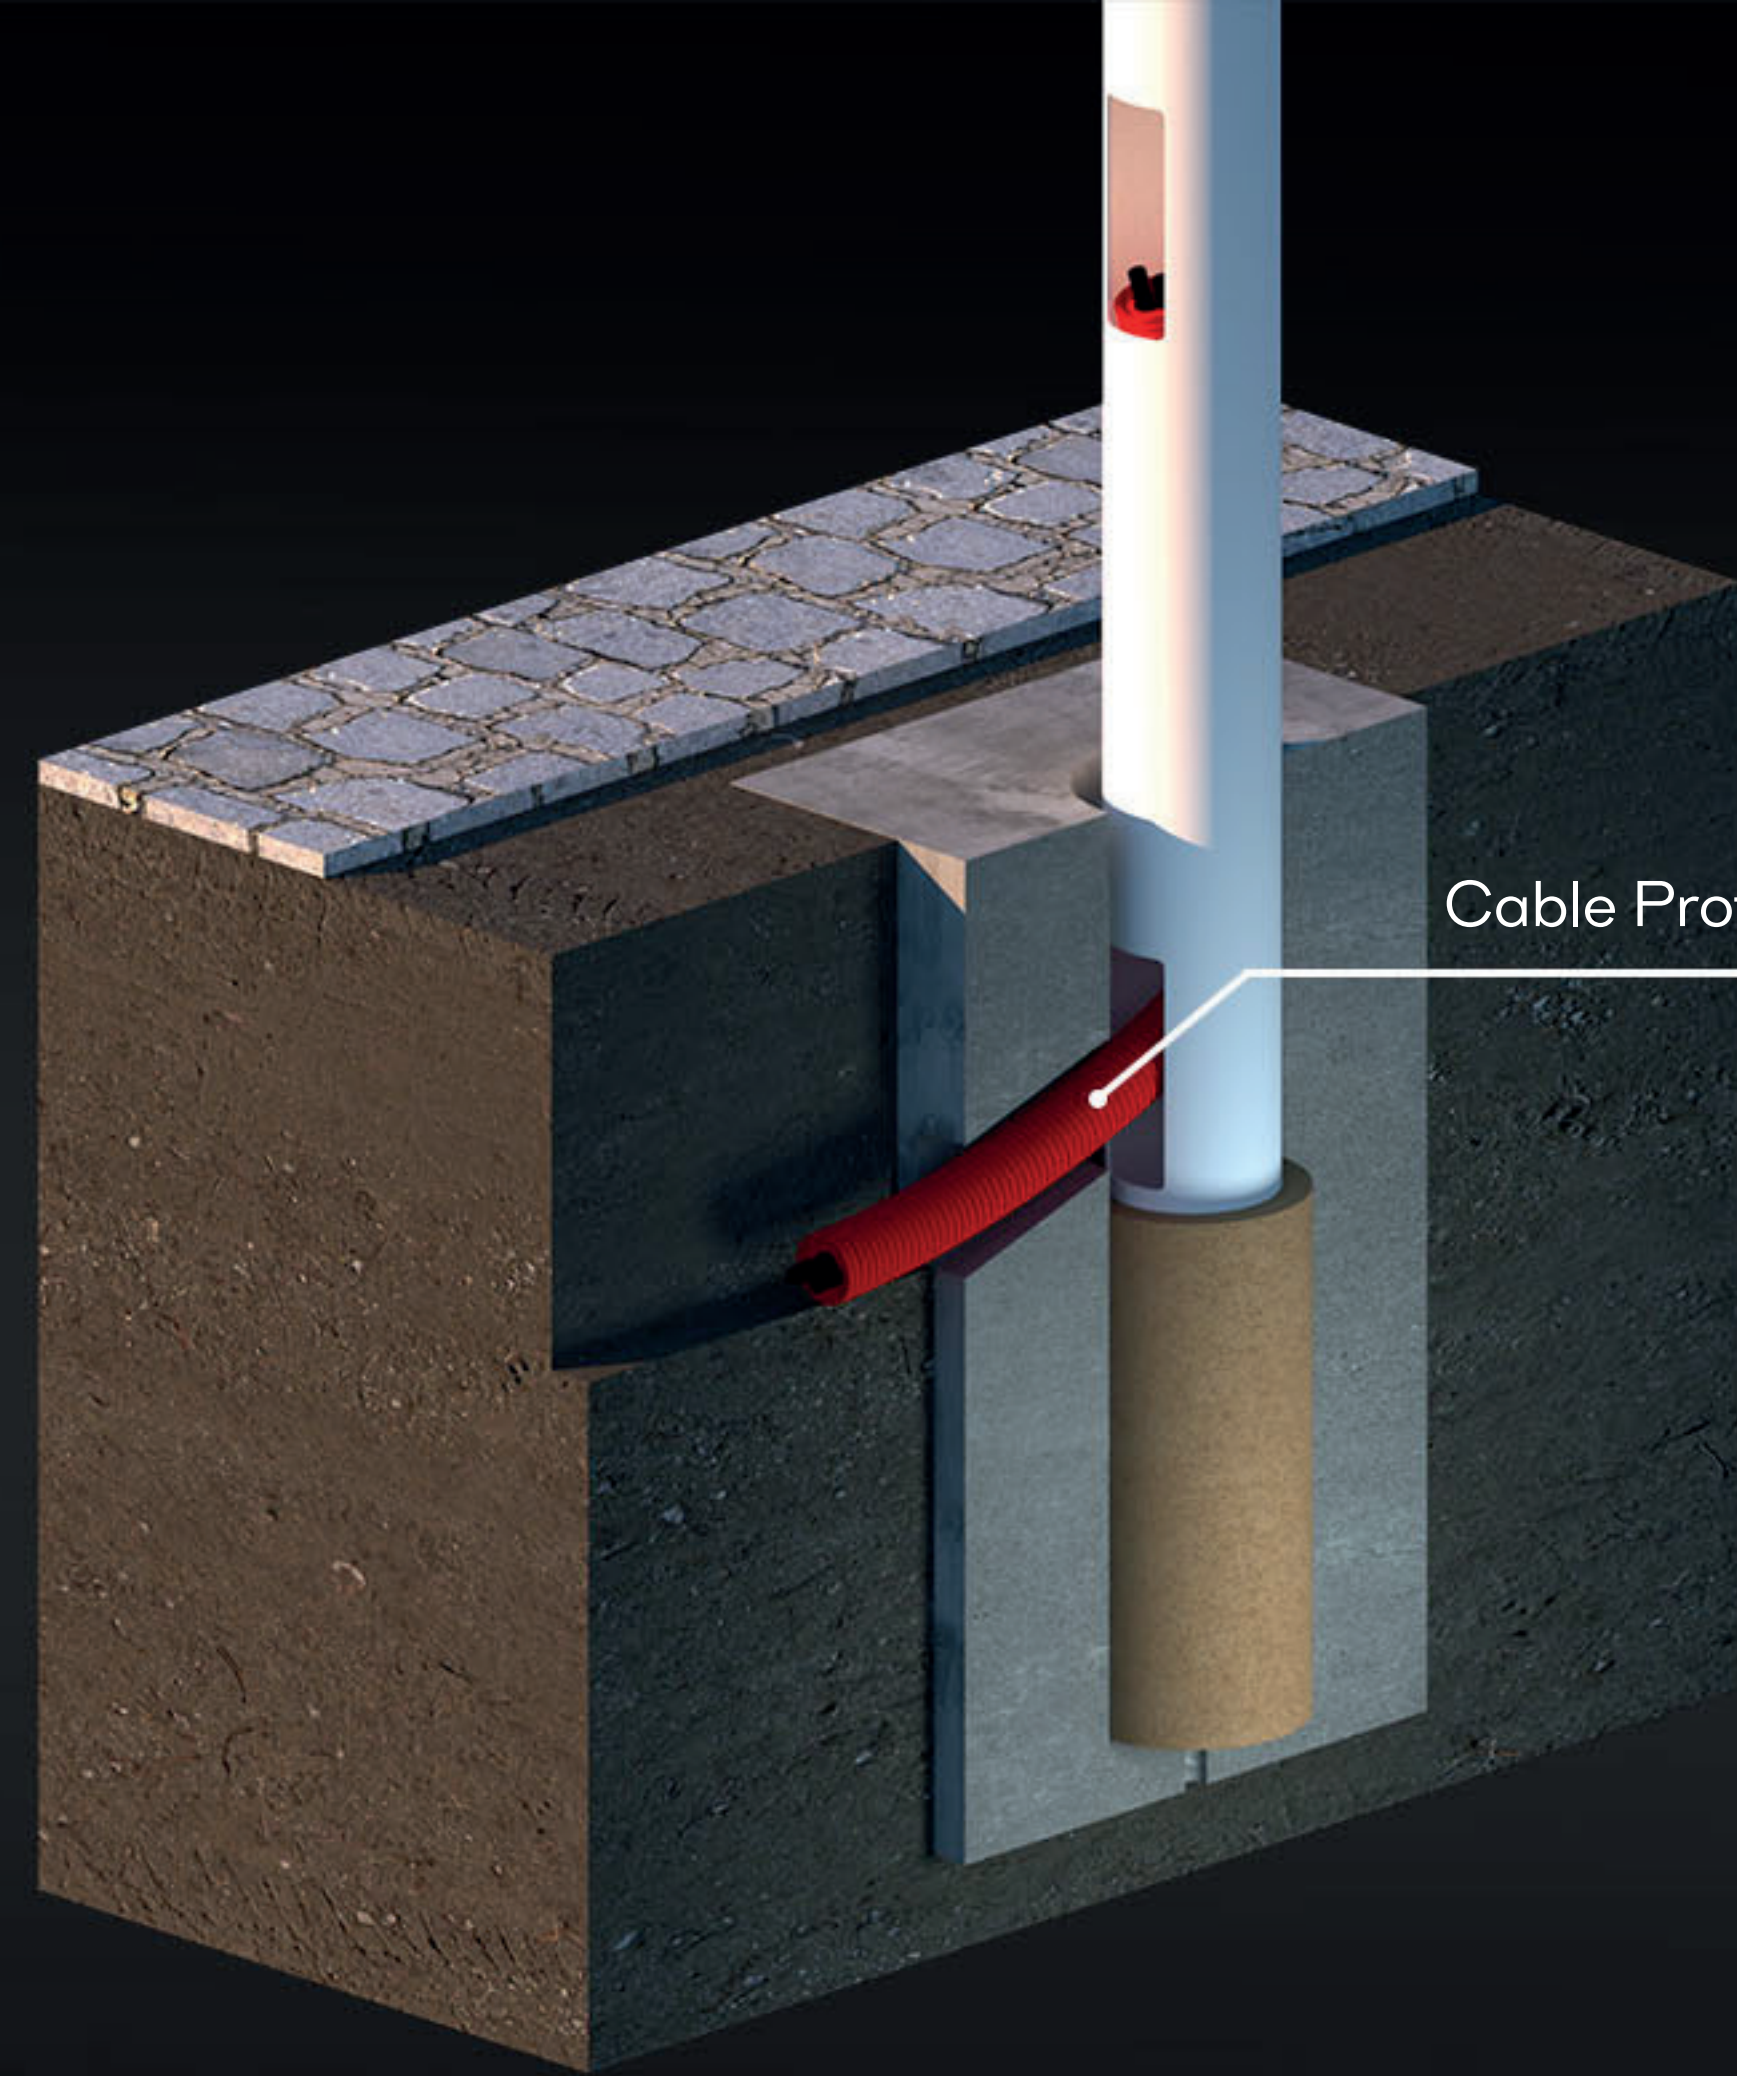


Cable Protection - for input power cable and LAN cable FTP CAT 5 for internet and image sync



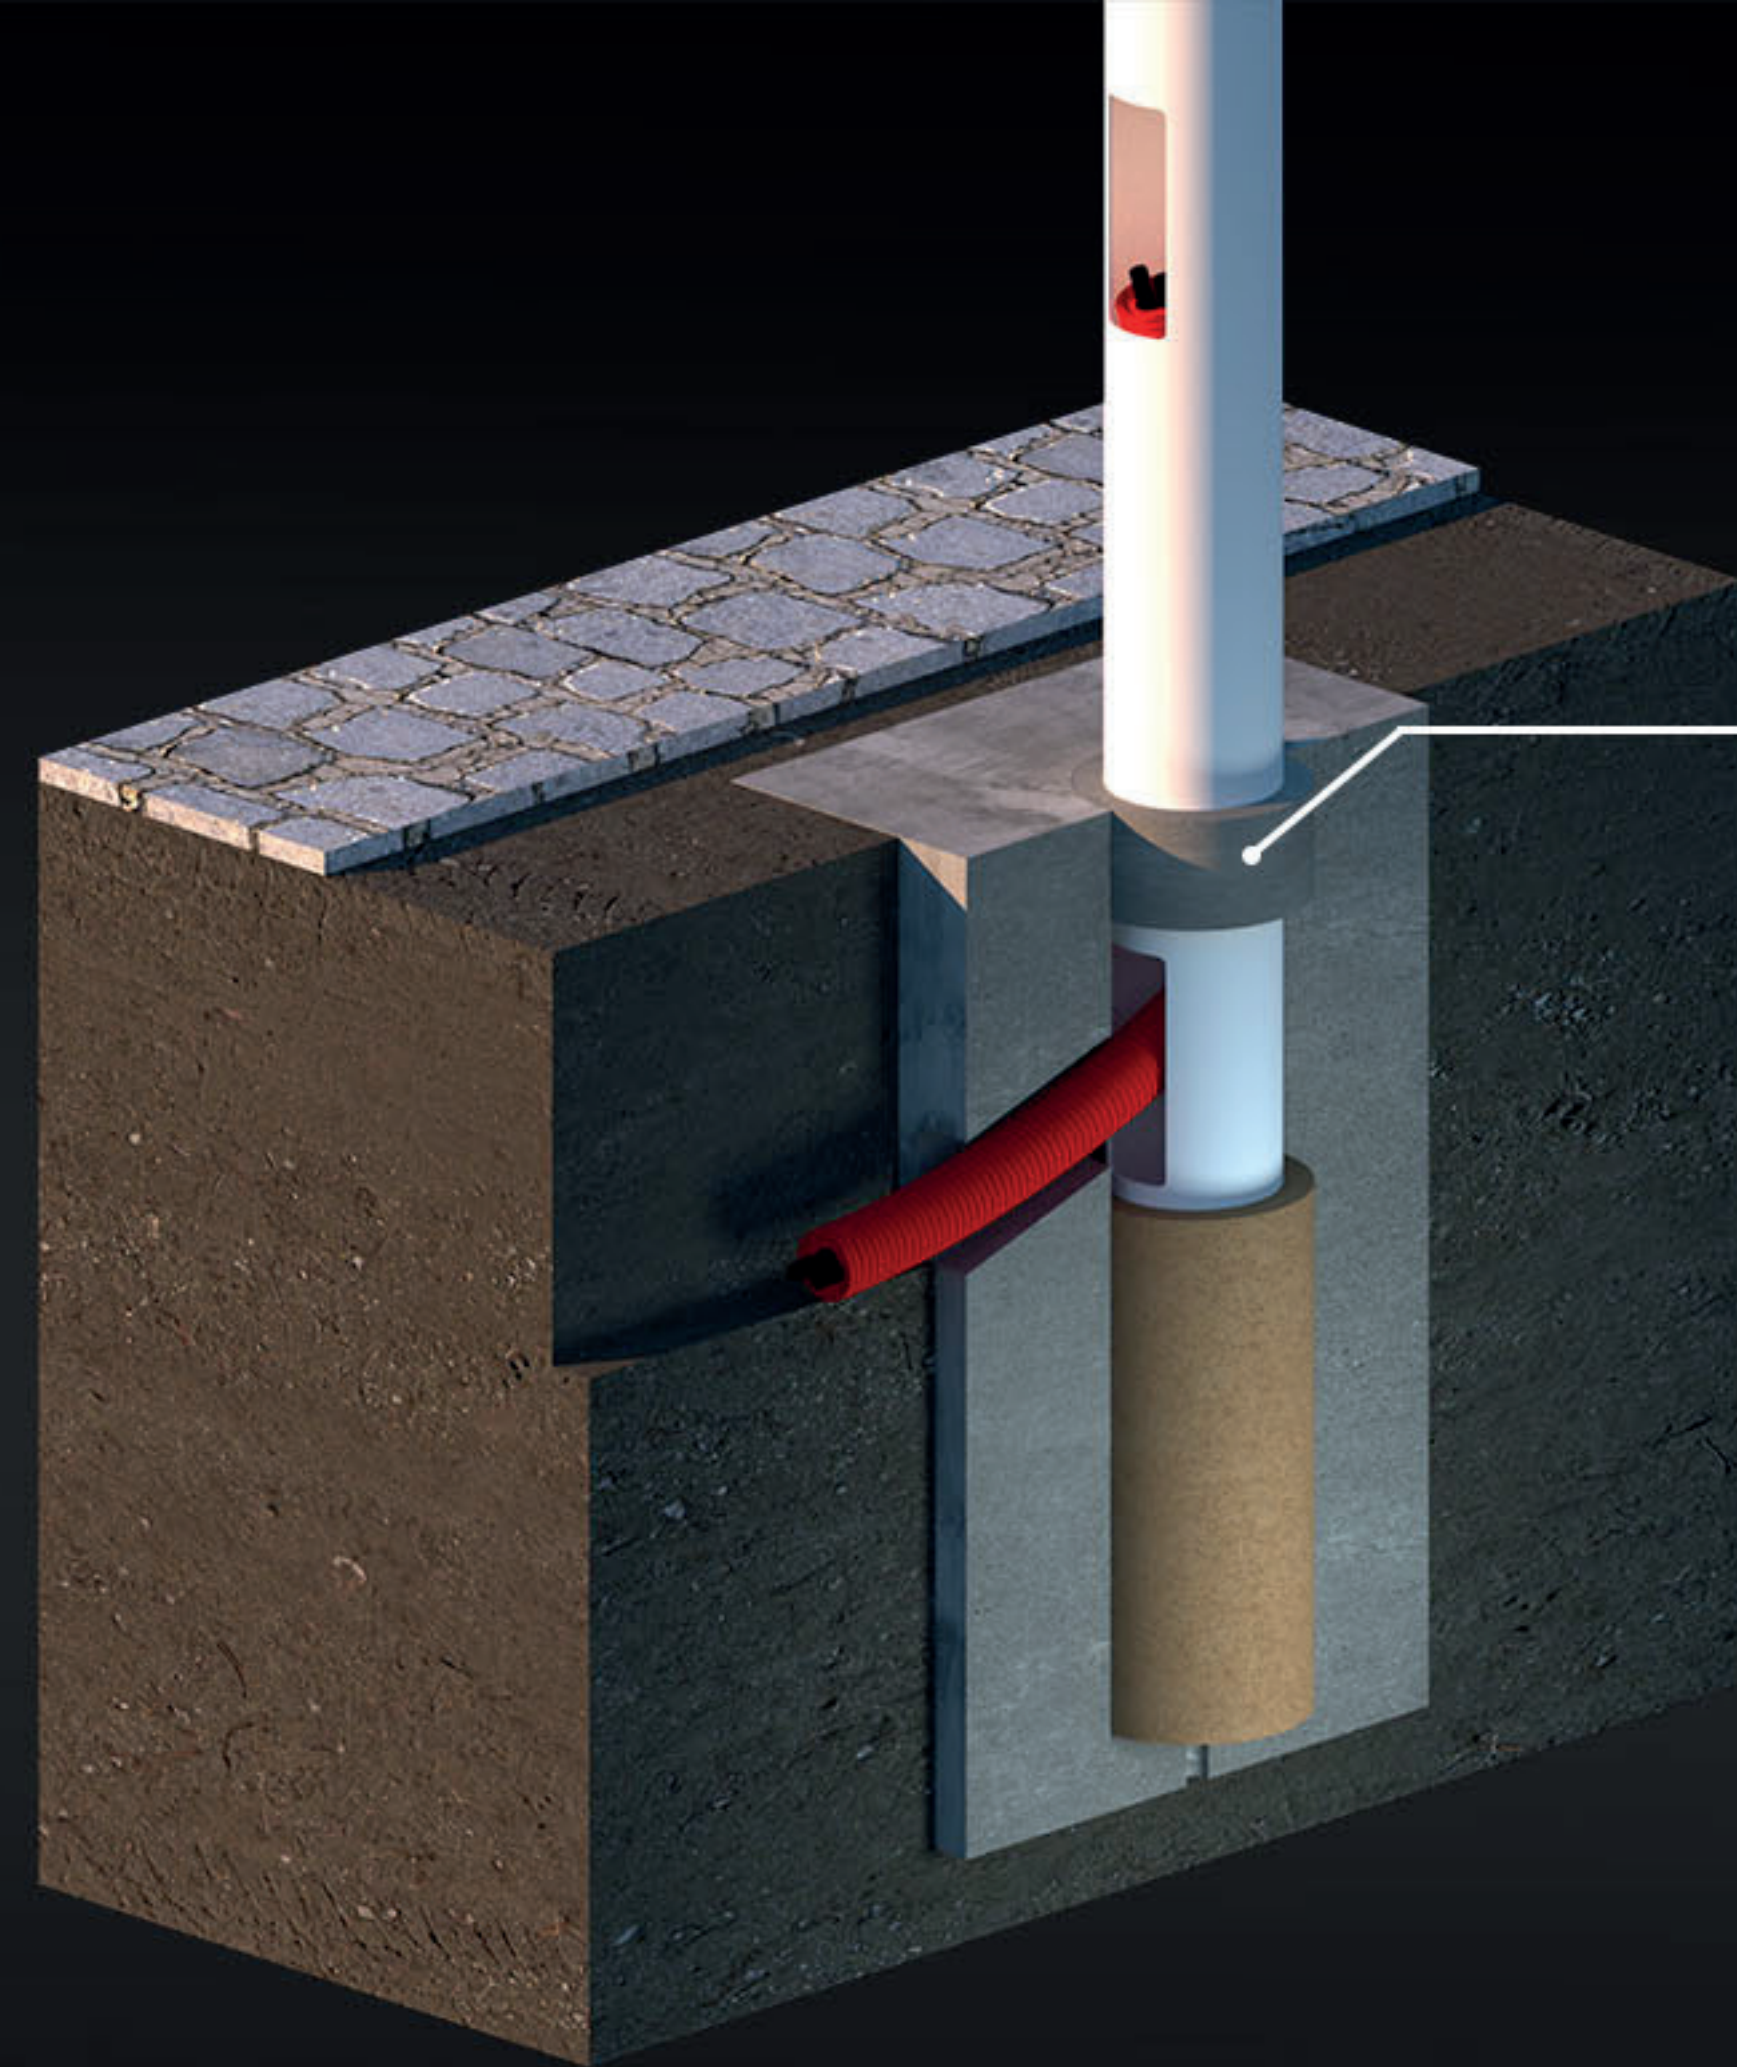


Secure the construction with fine concrete cap



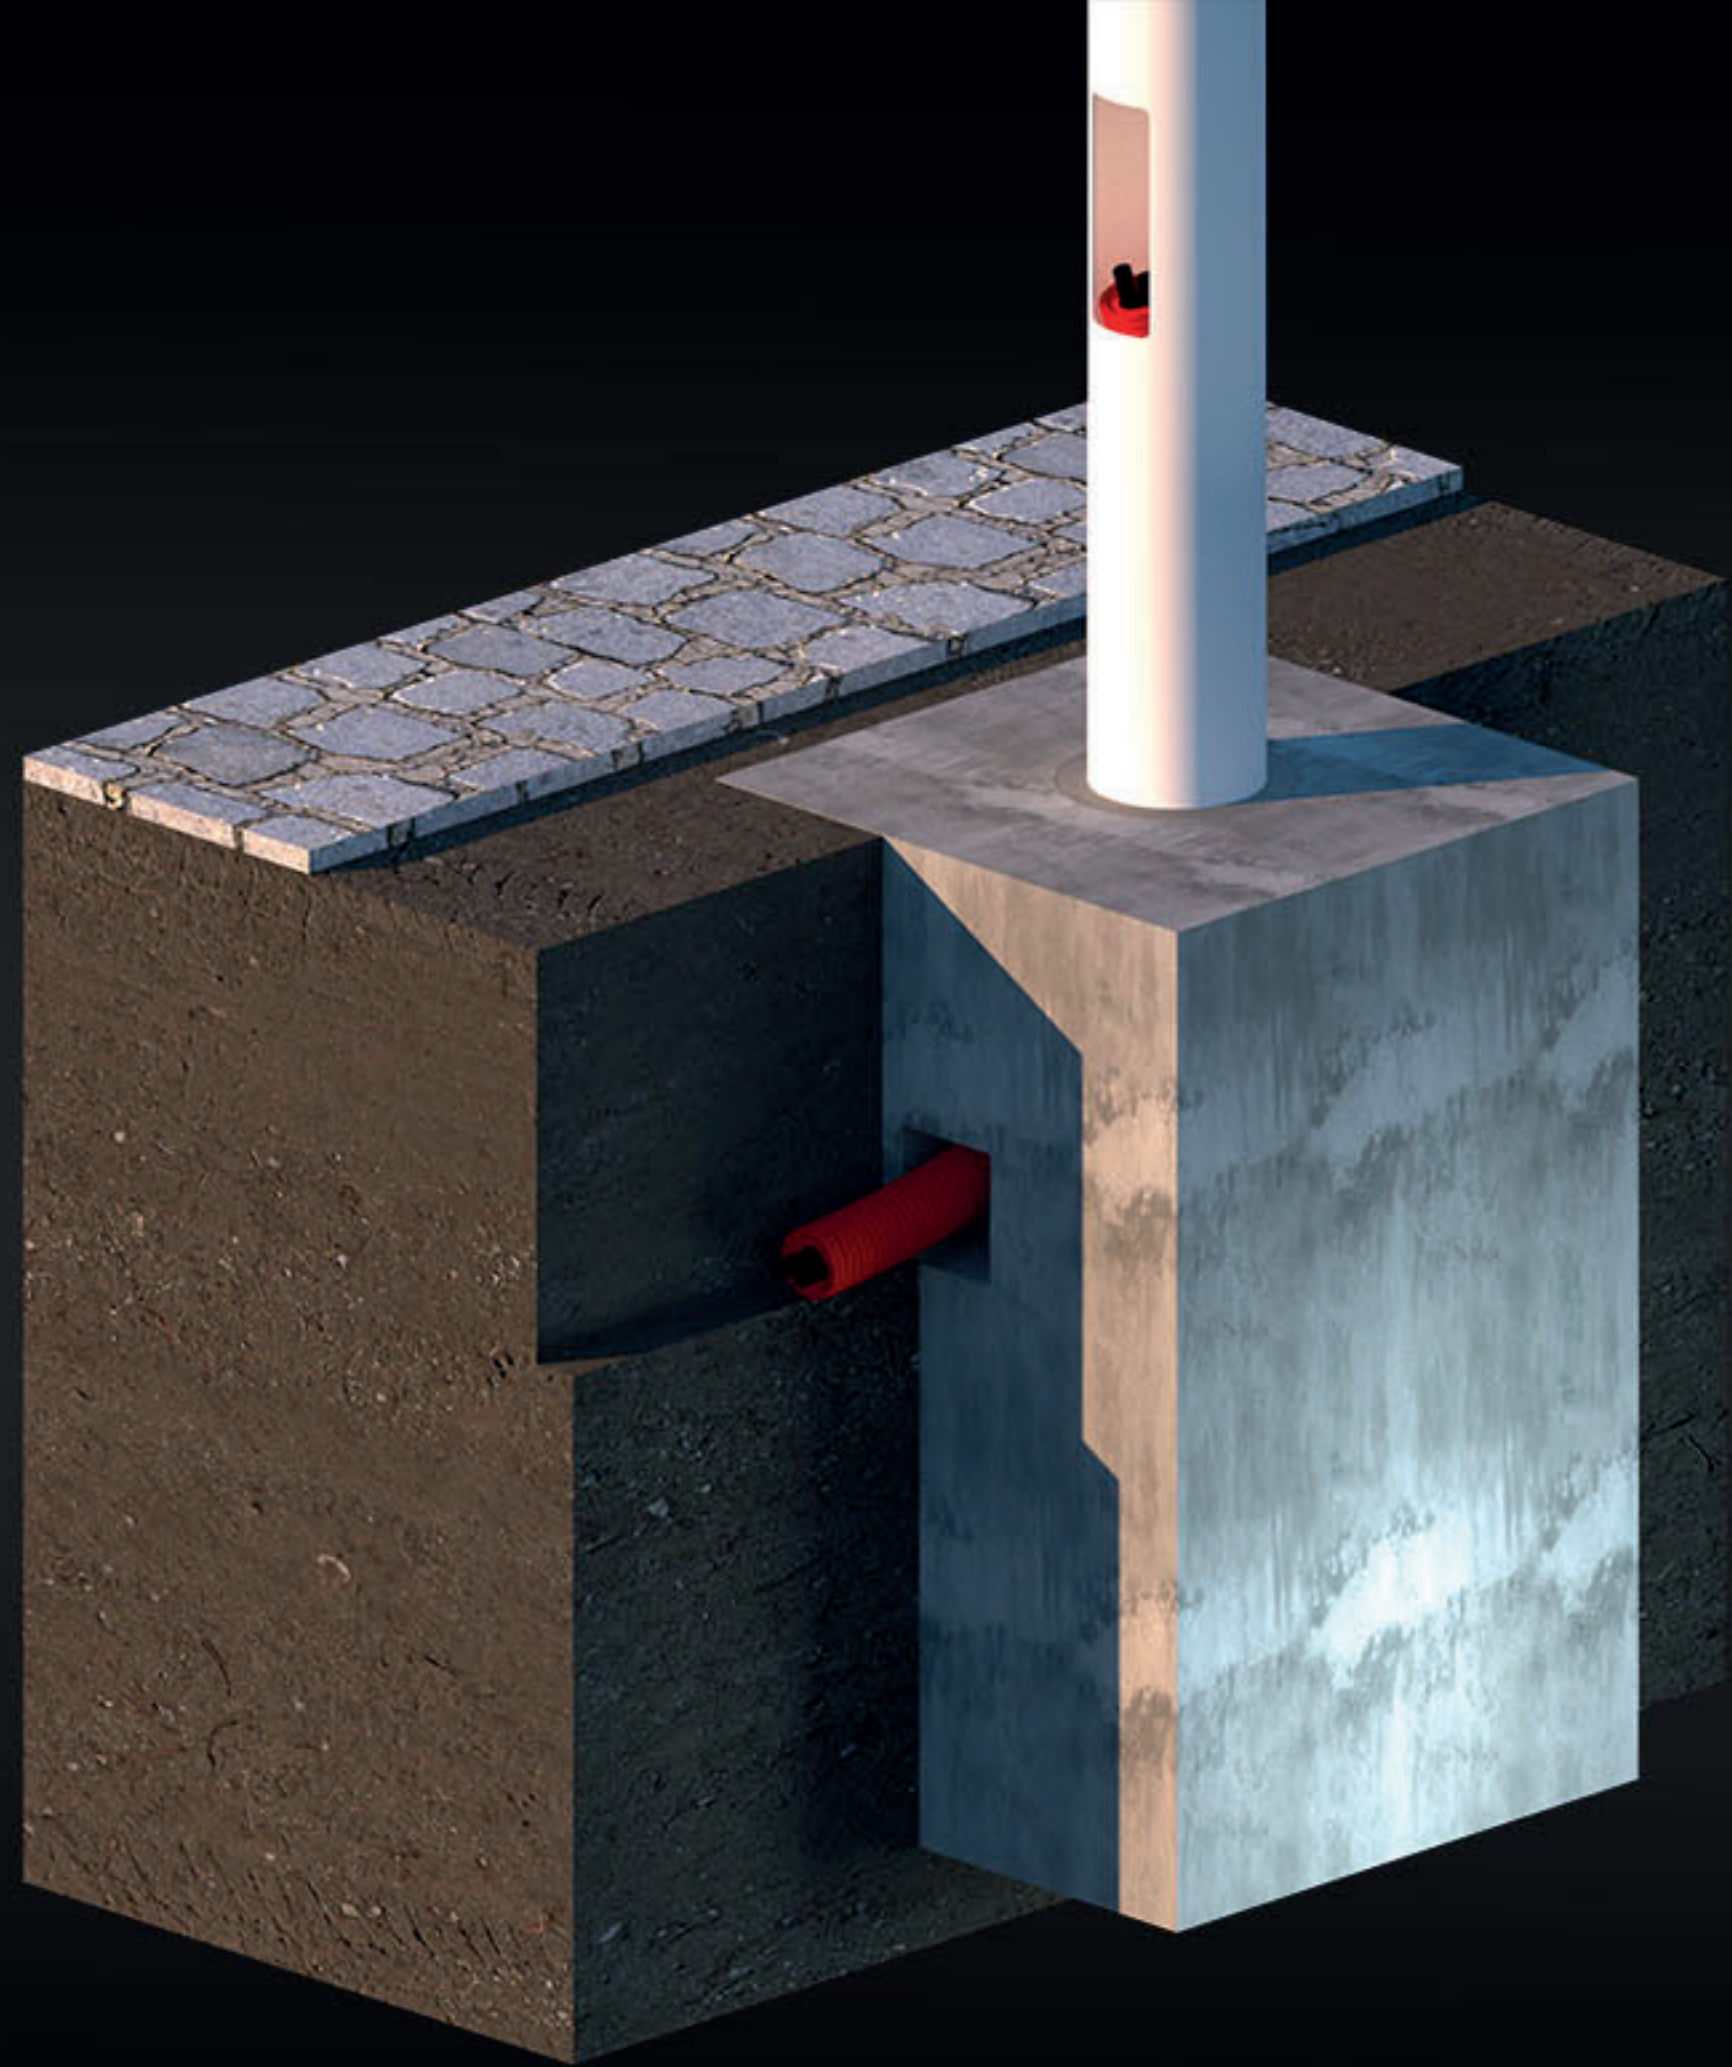


A



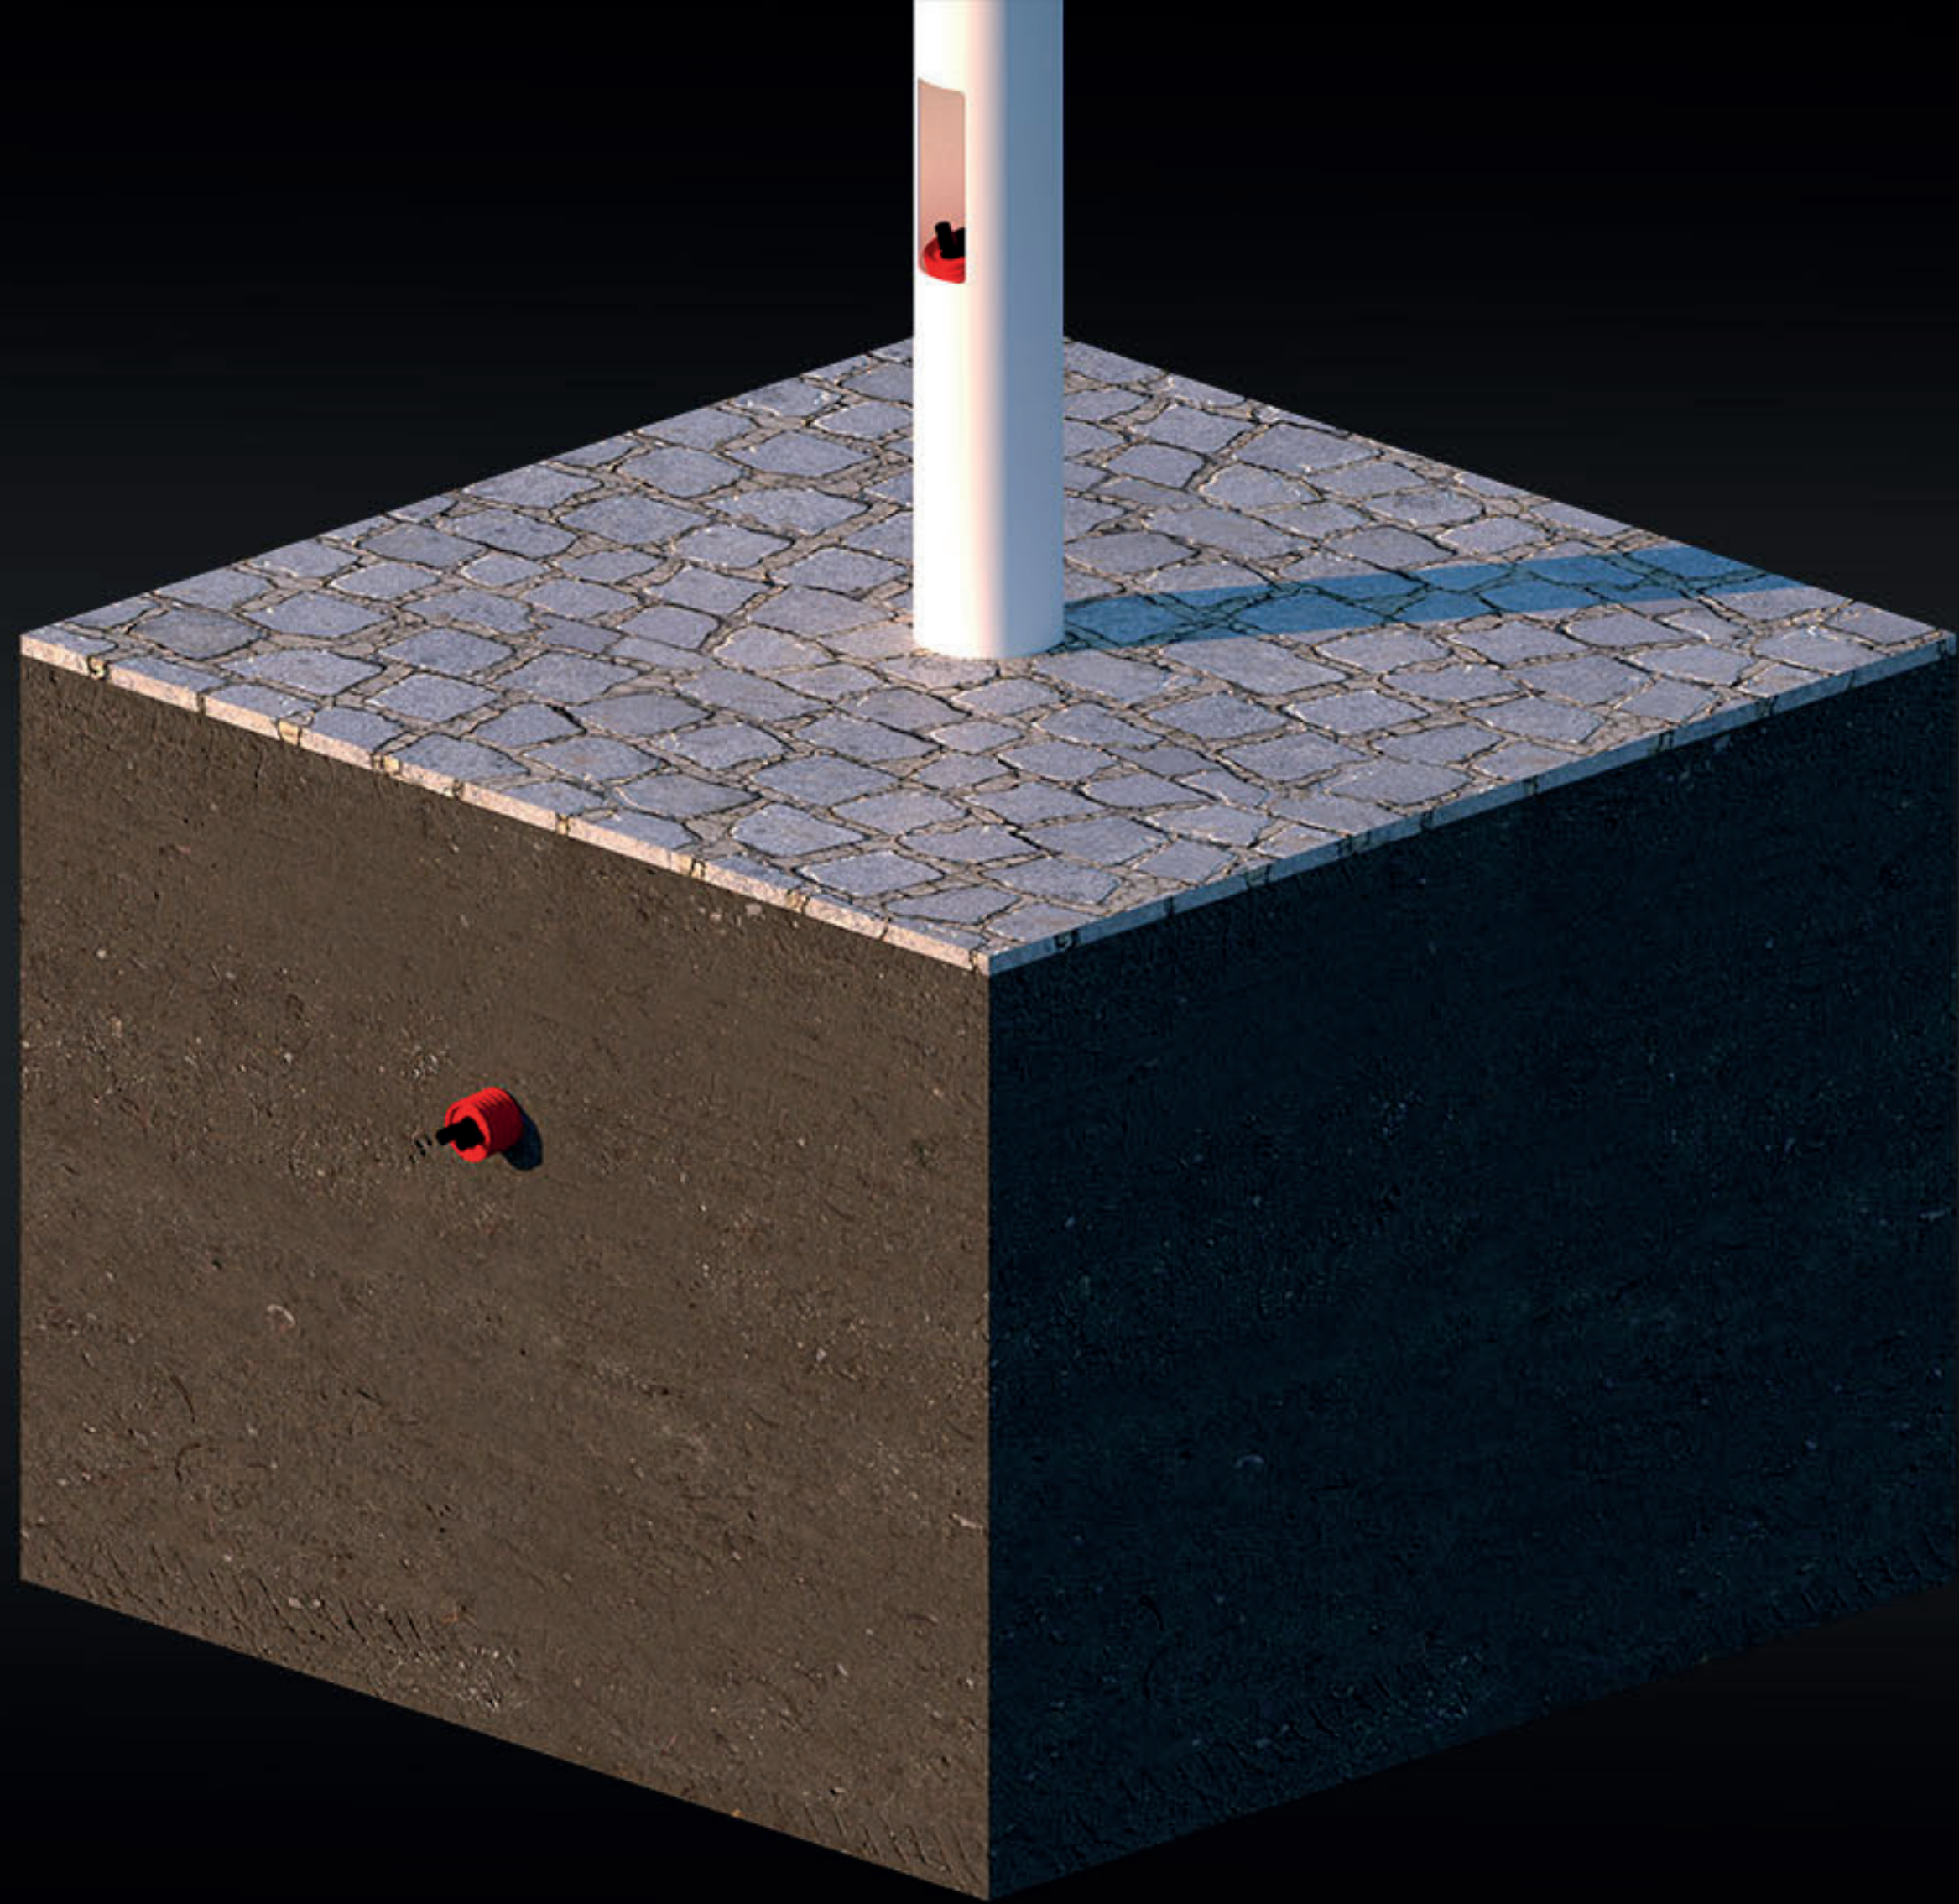

A




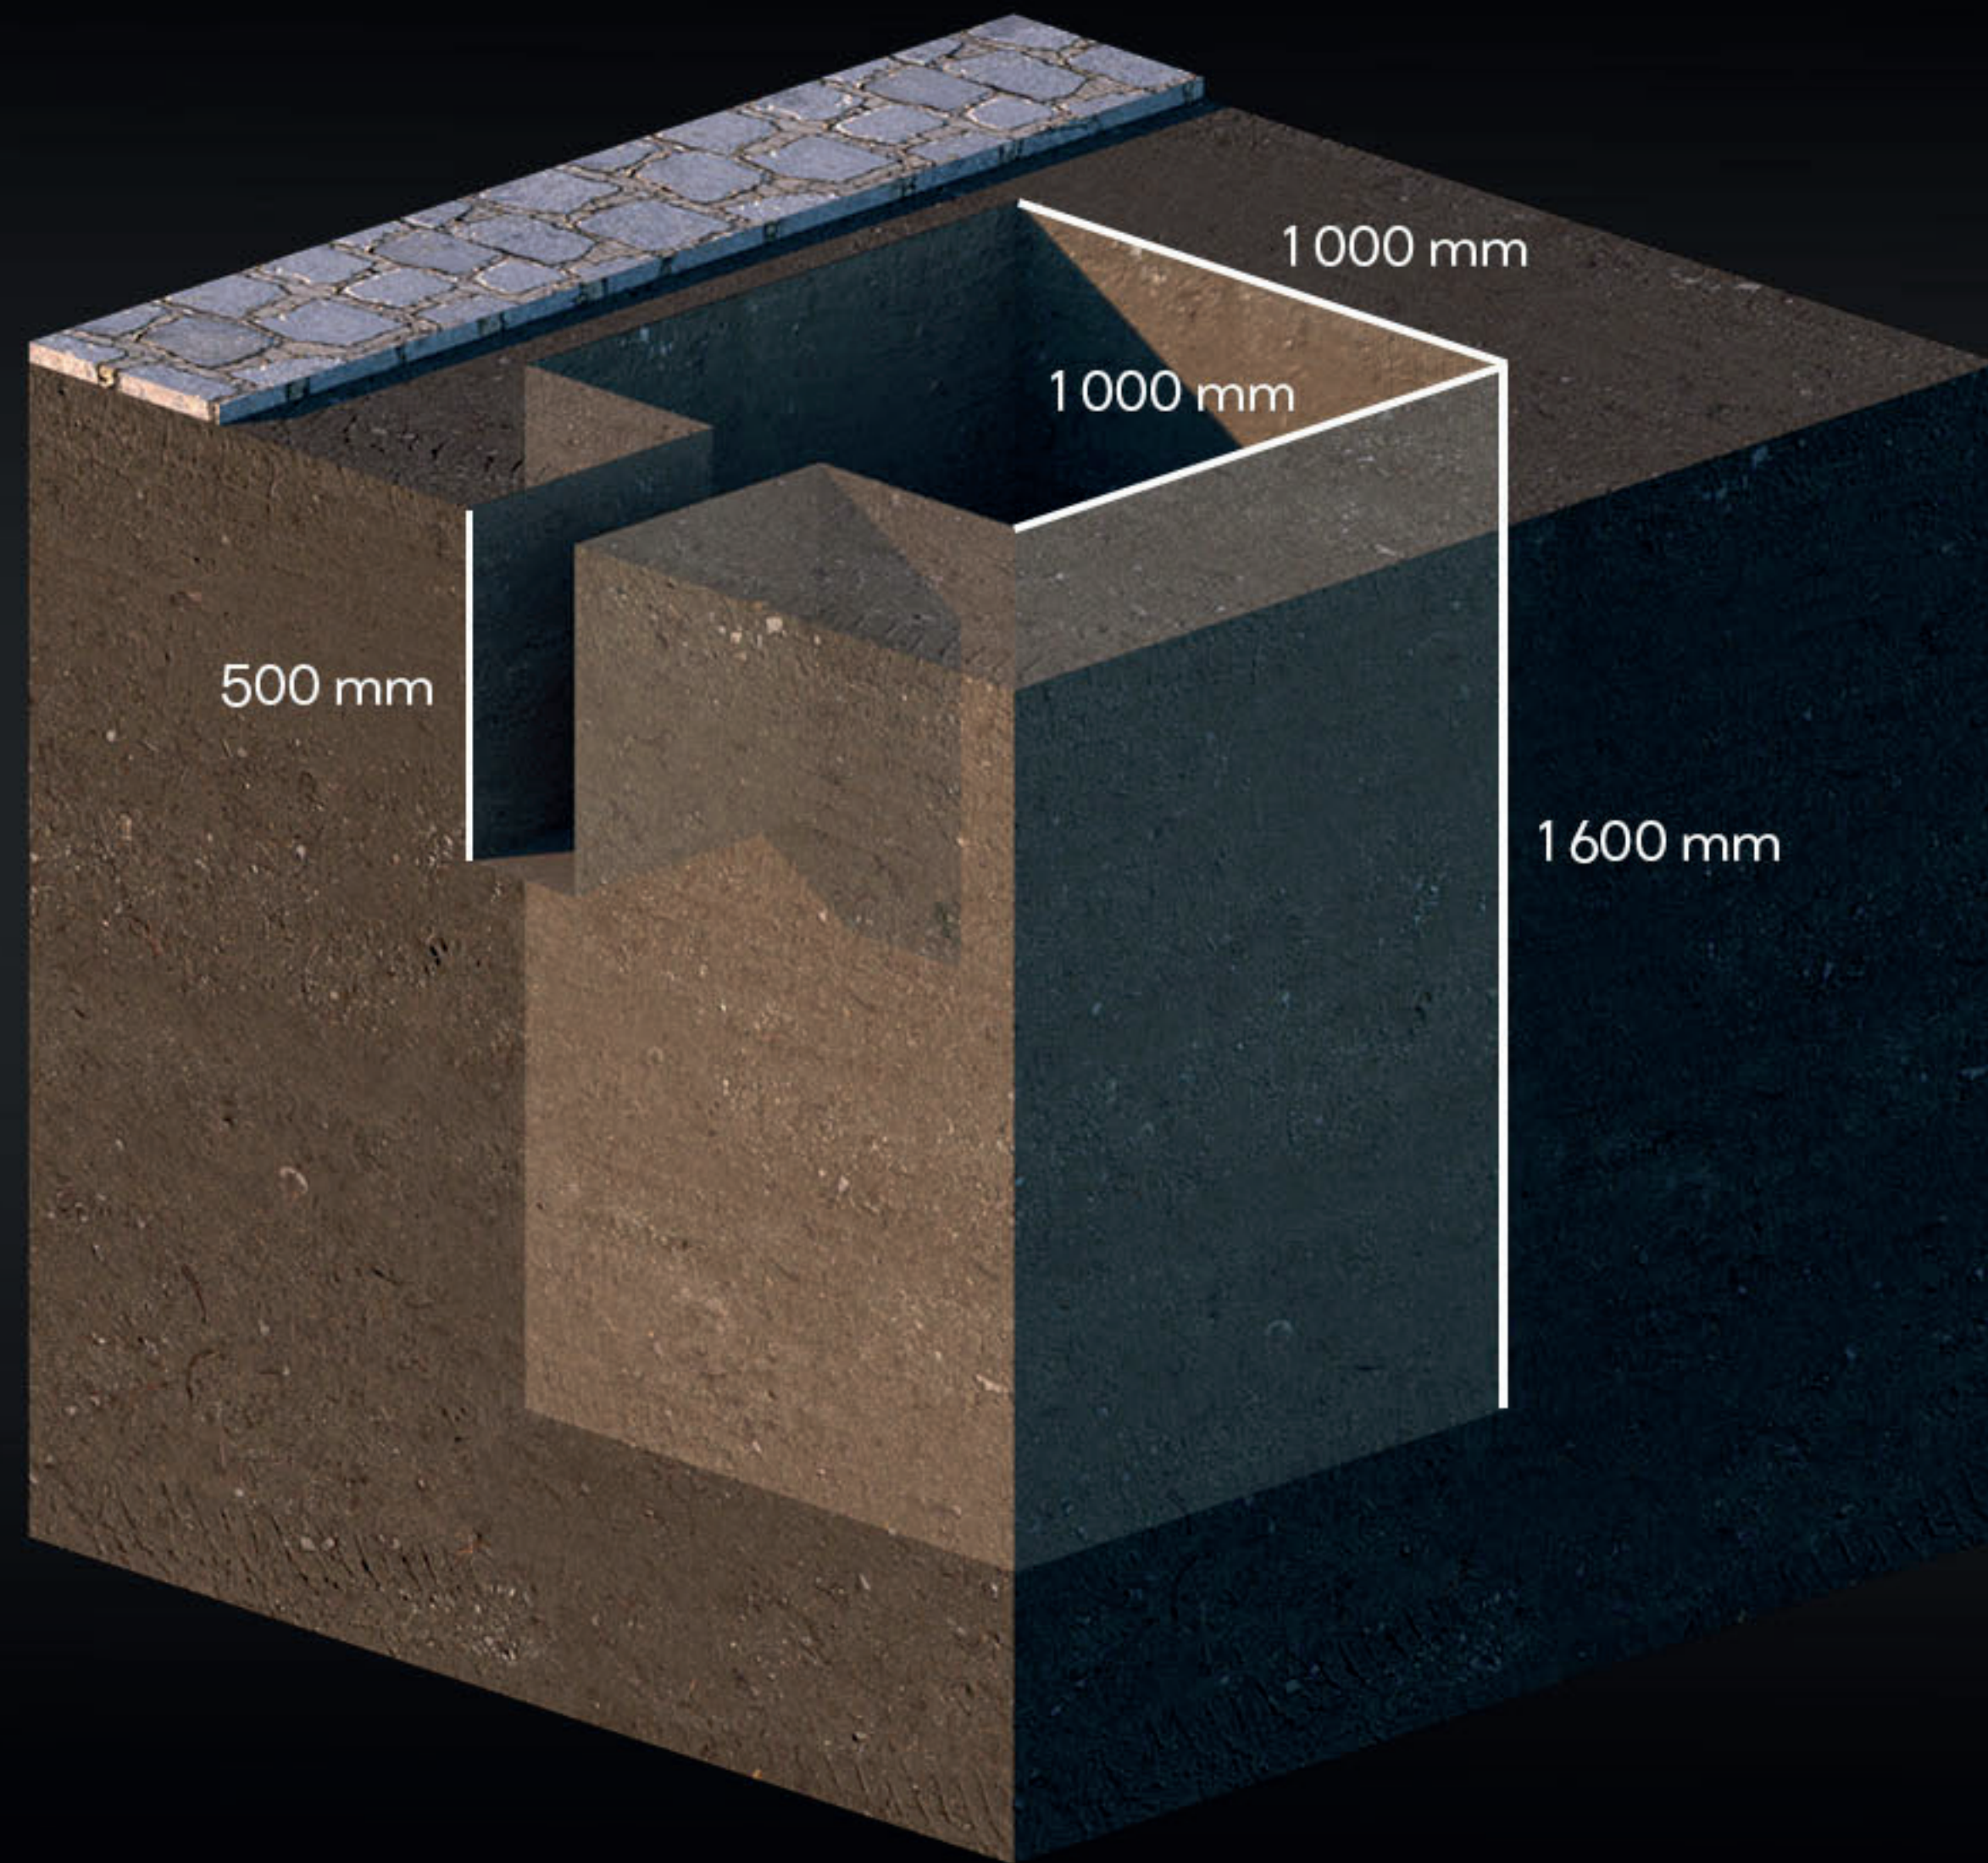

Max 6 rows / 12 projectors


B



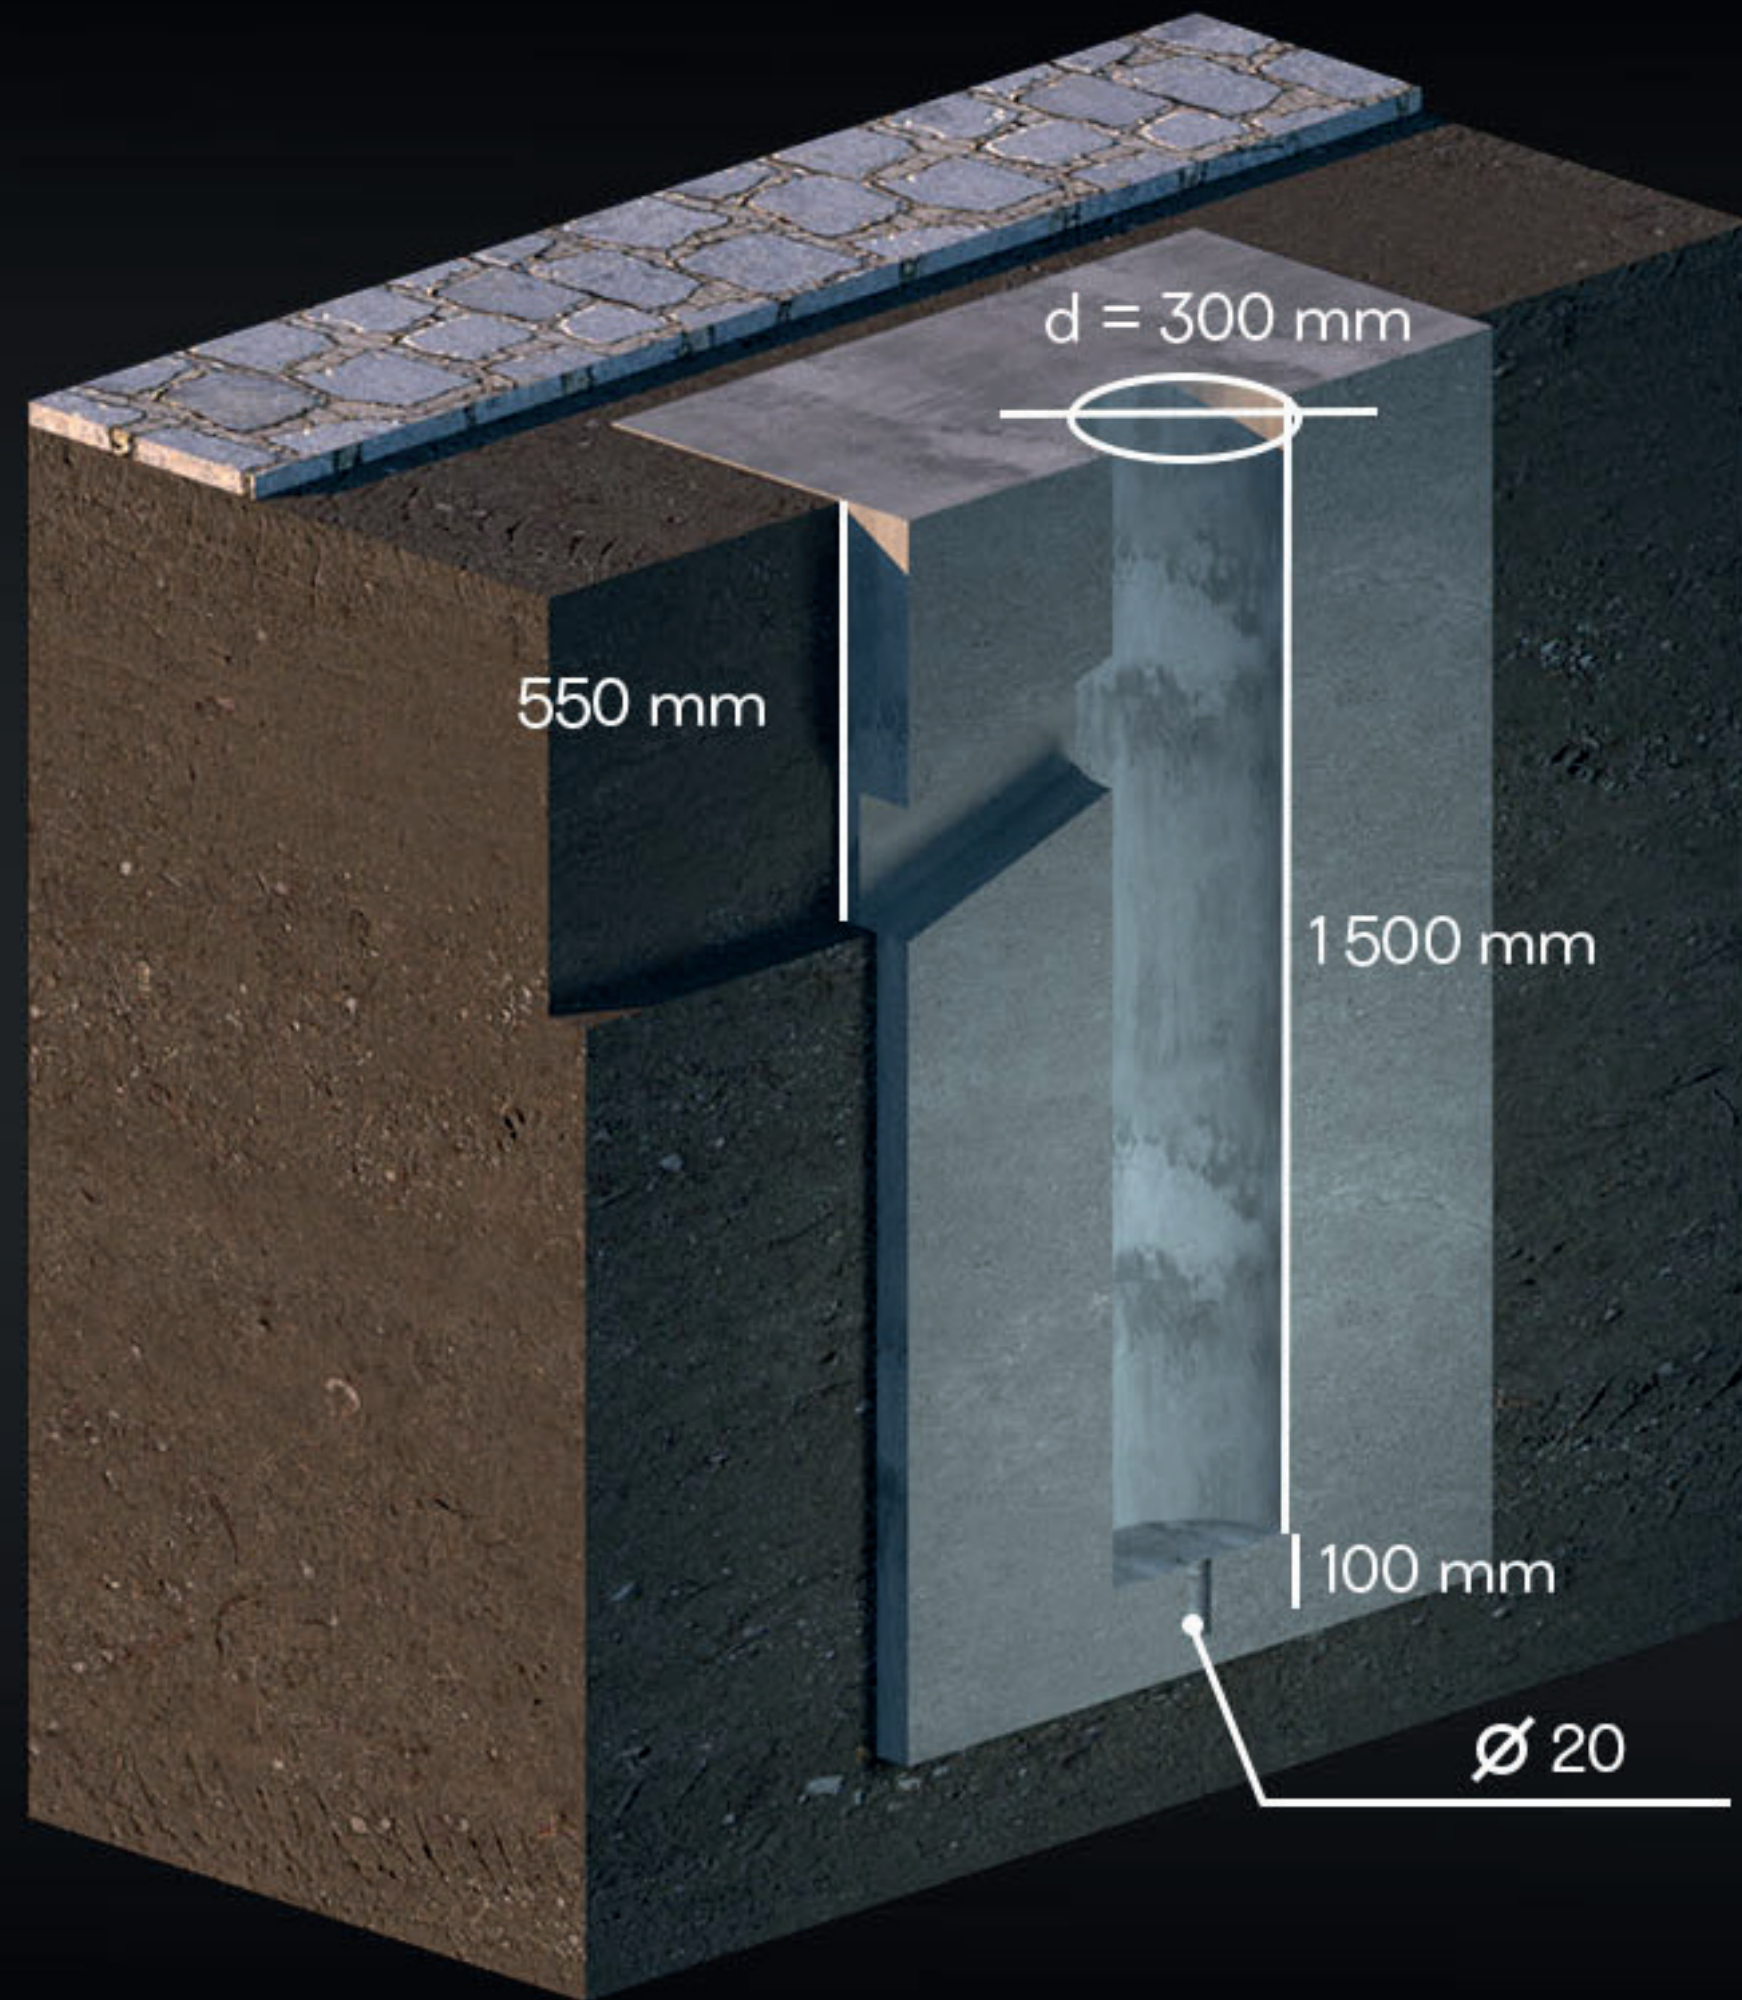

B




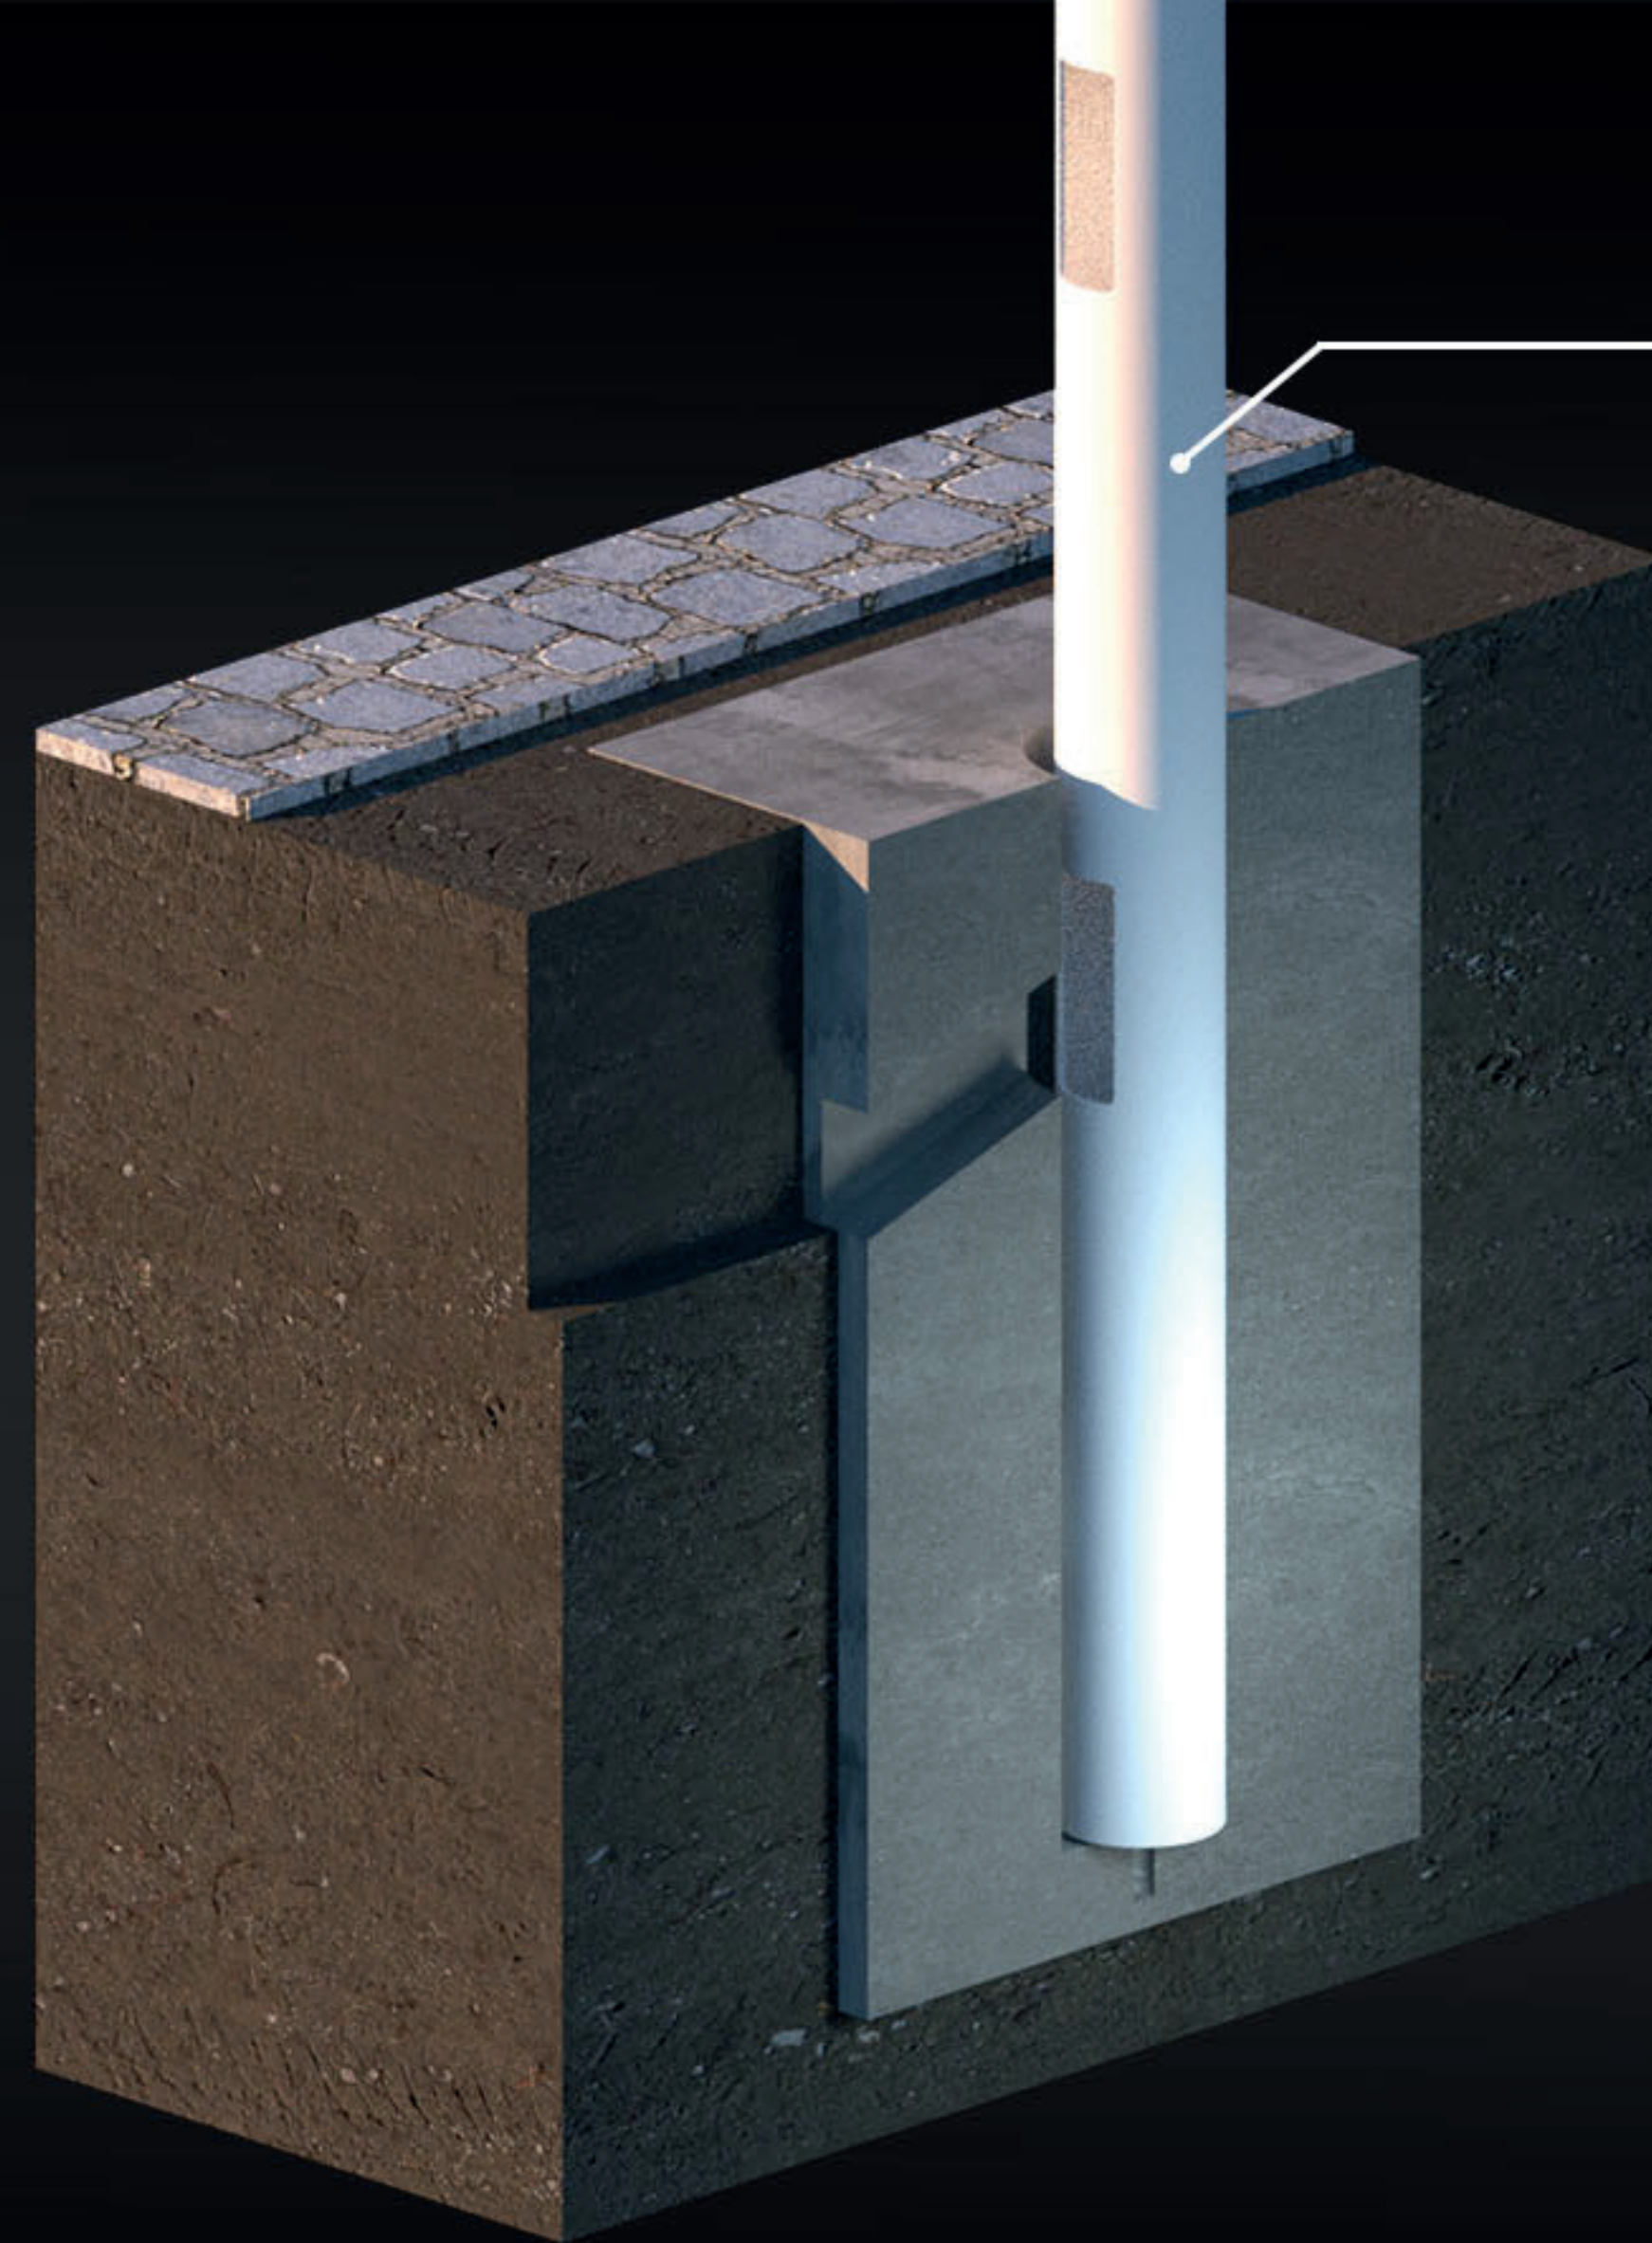

Main column B


Secure the post in perfectly vertical position with wooden pieces. Make sure the door is accessible for the underground cable insert.



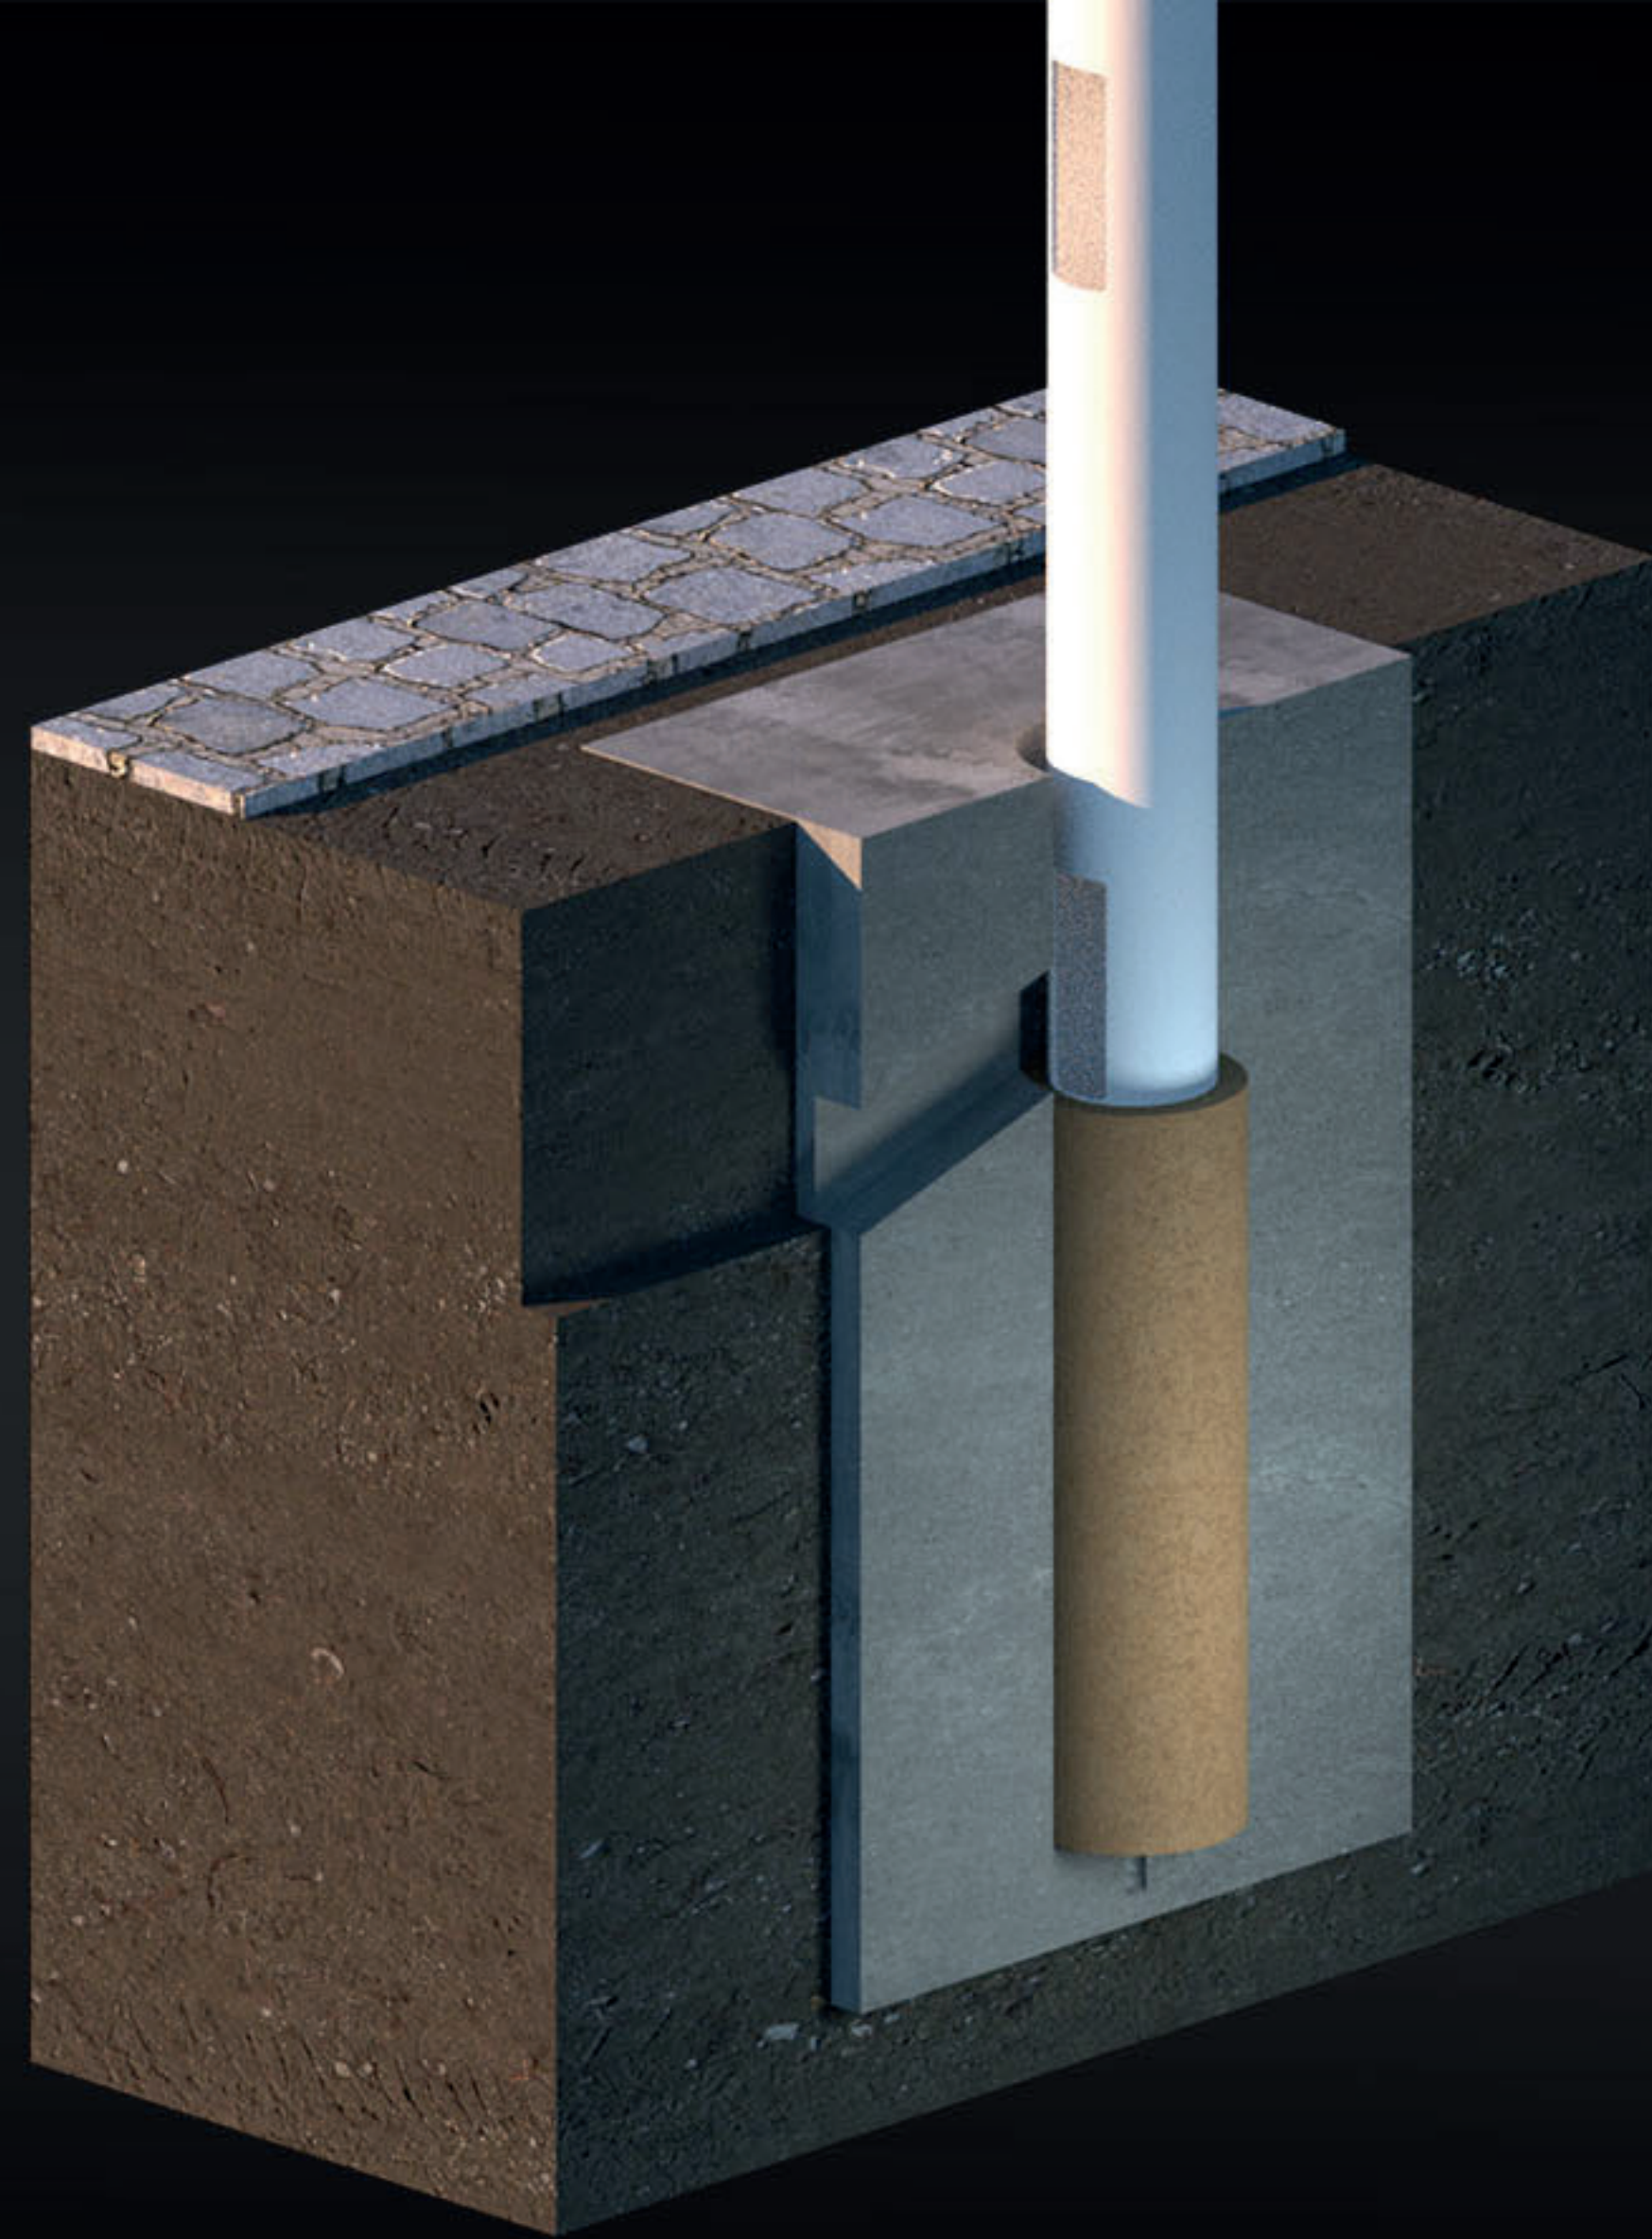


Thicken in fine sand. This will secure the Main Post in final position.



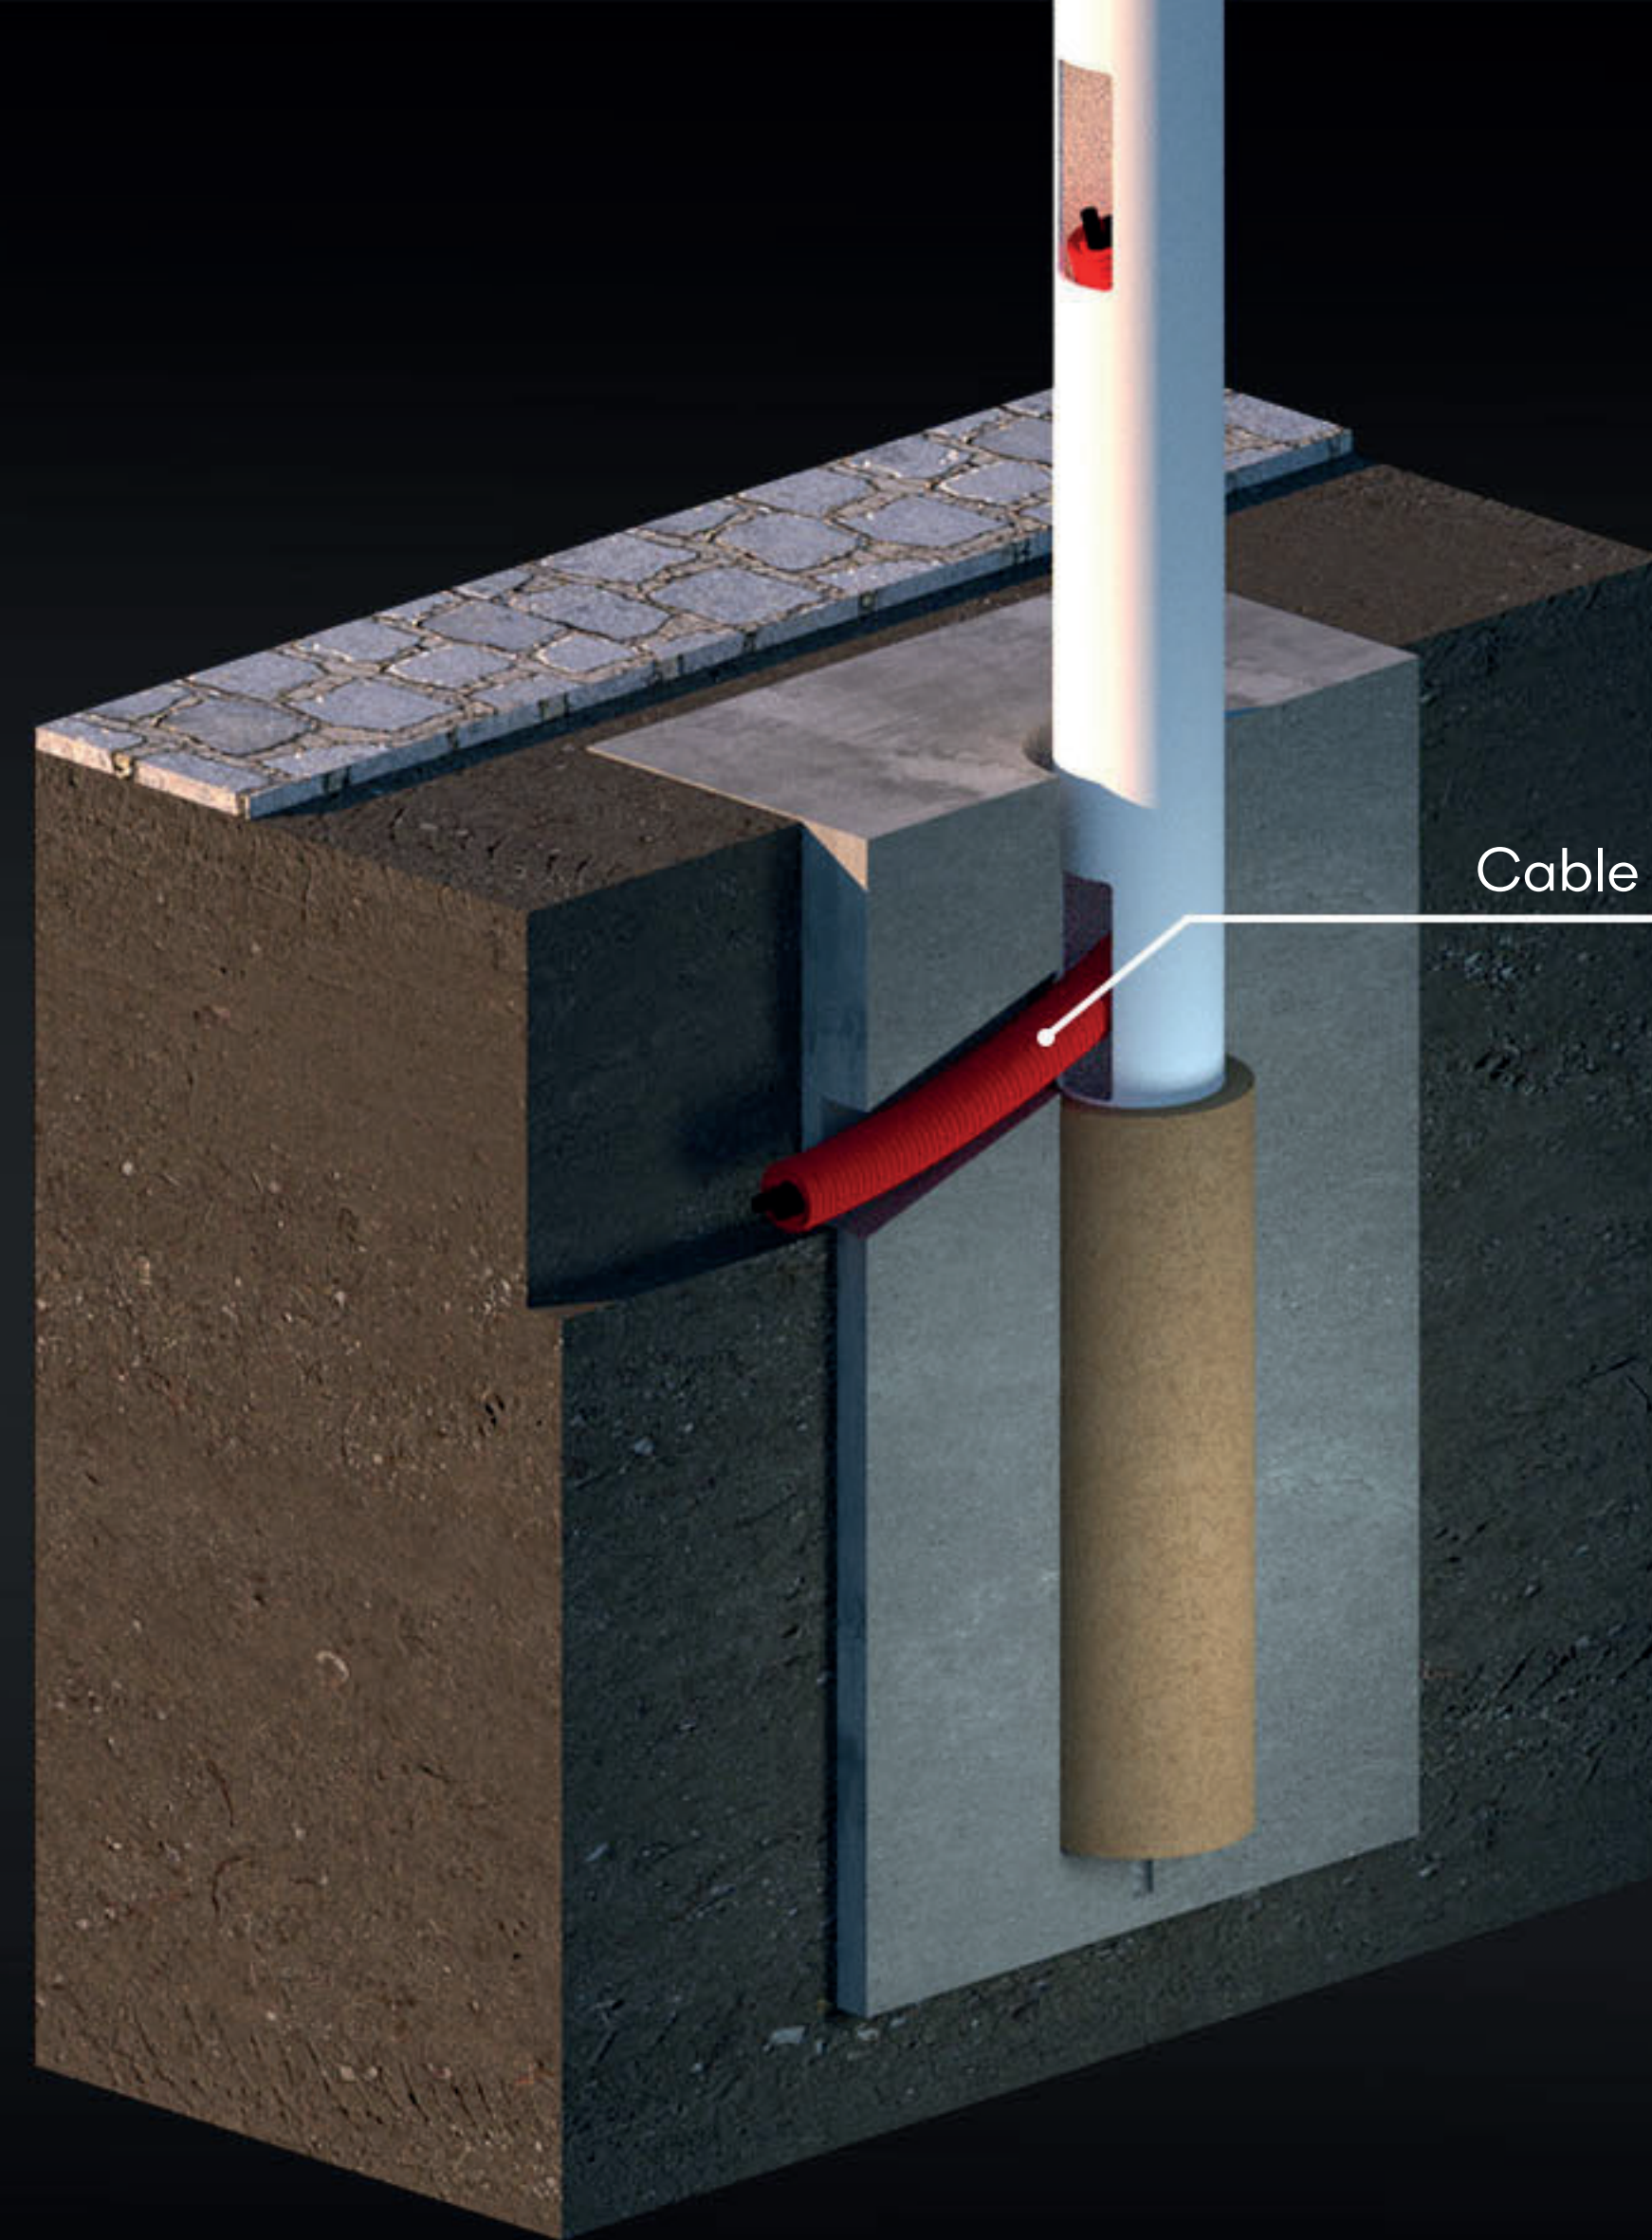


Cable Protection - for input power cable and LAN cable FTP CAT 5 for internet and image sync



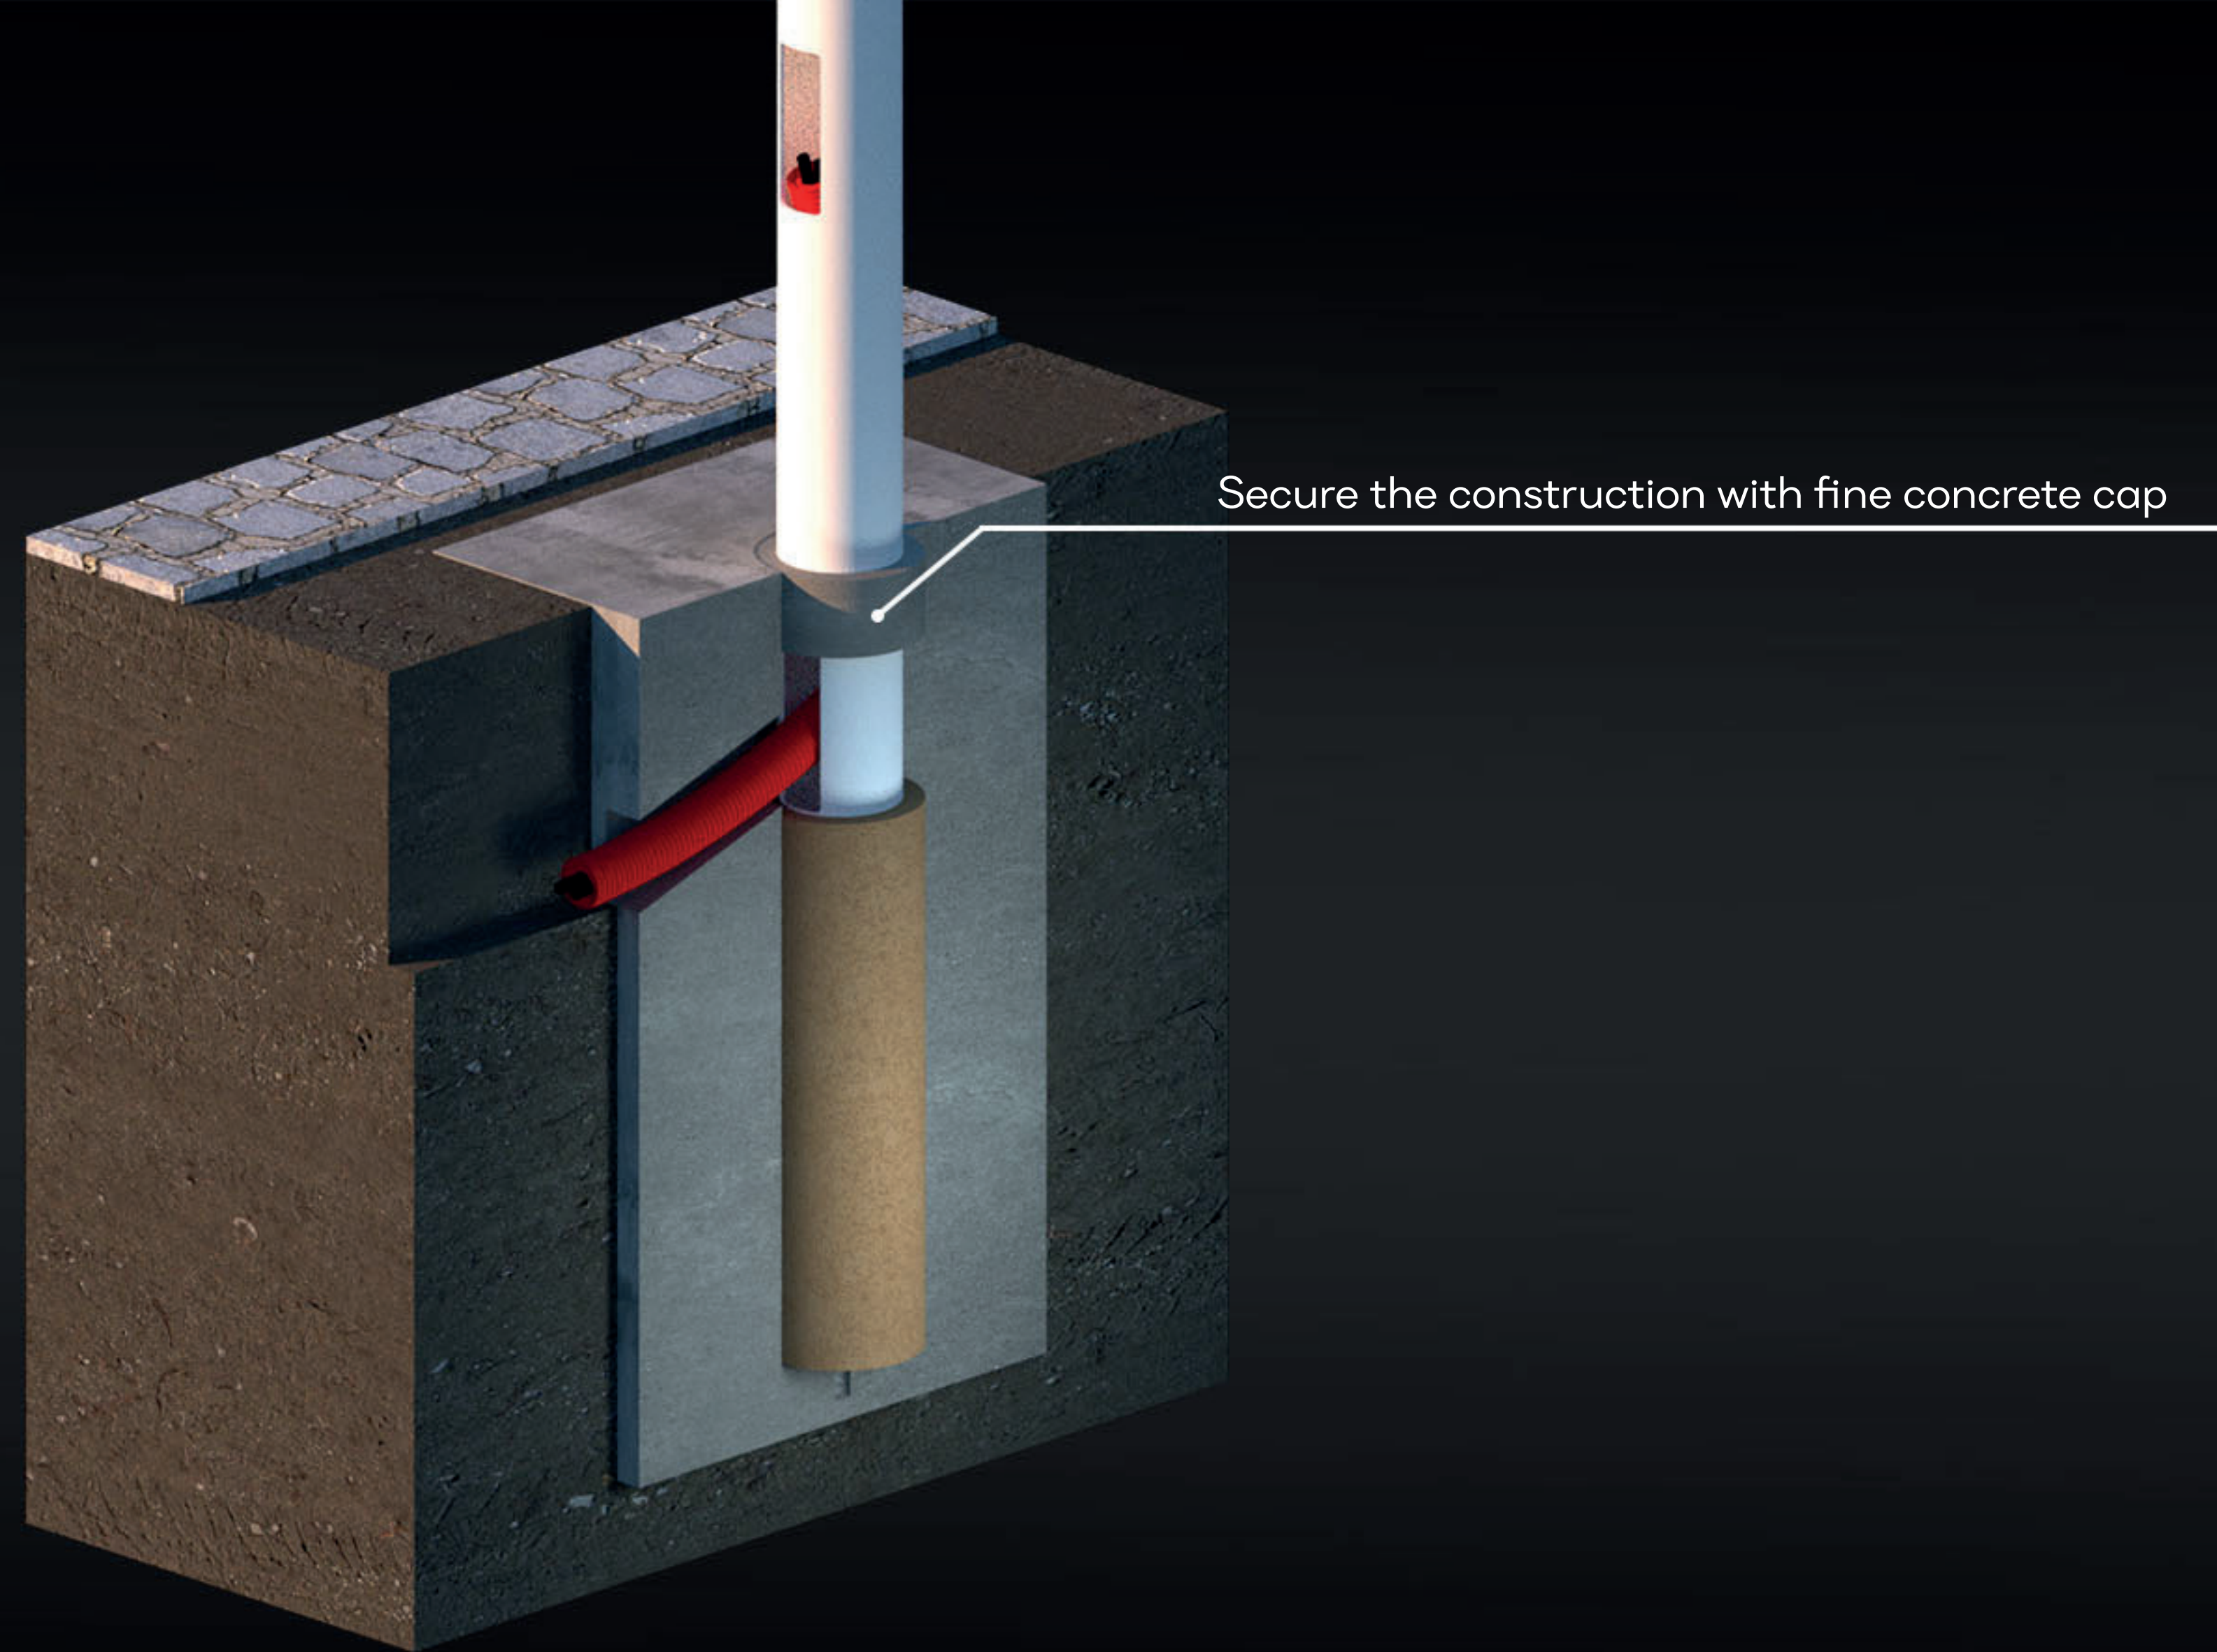


B



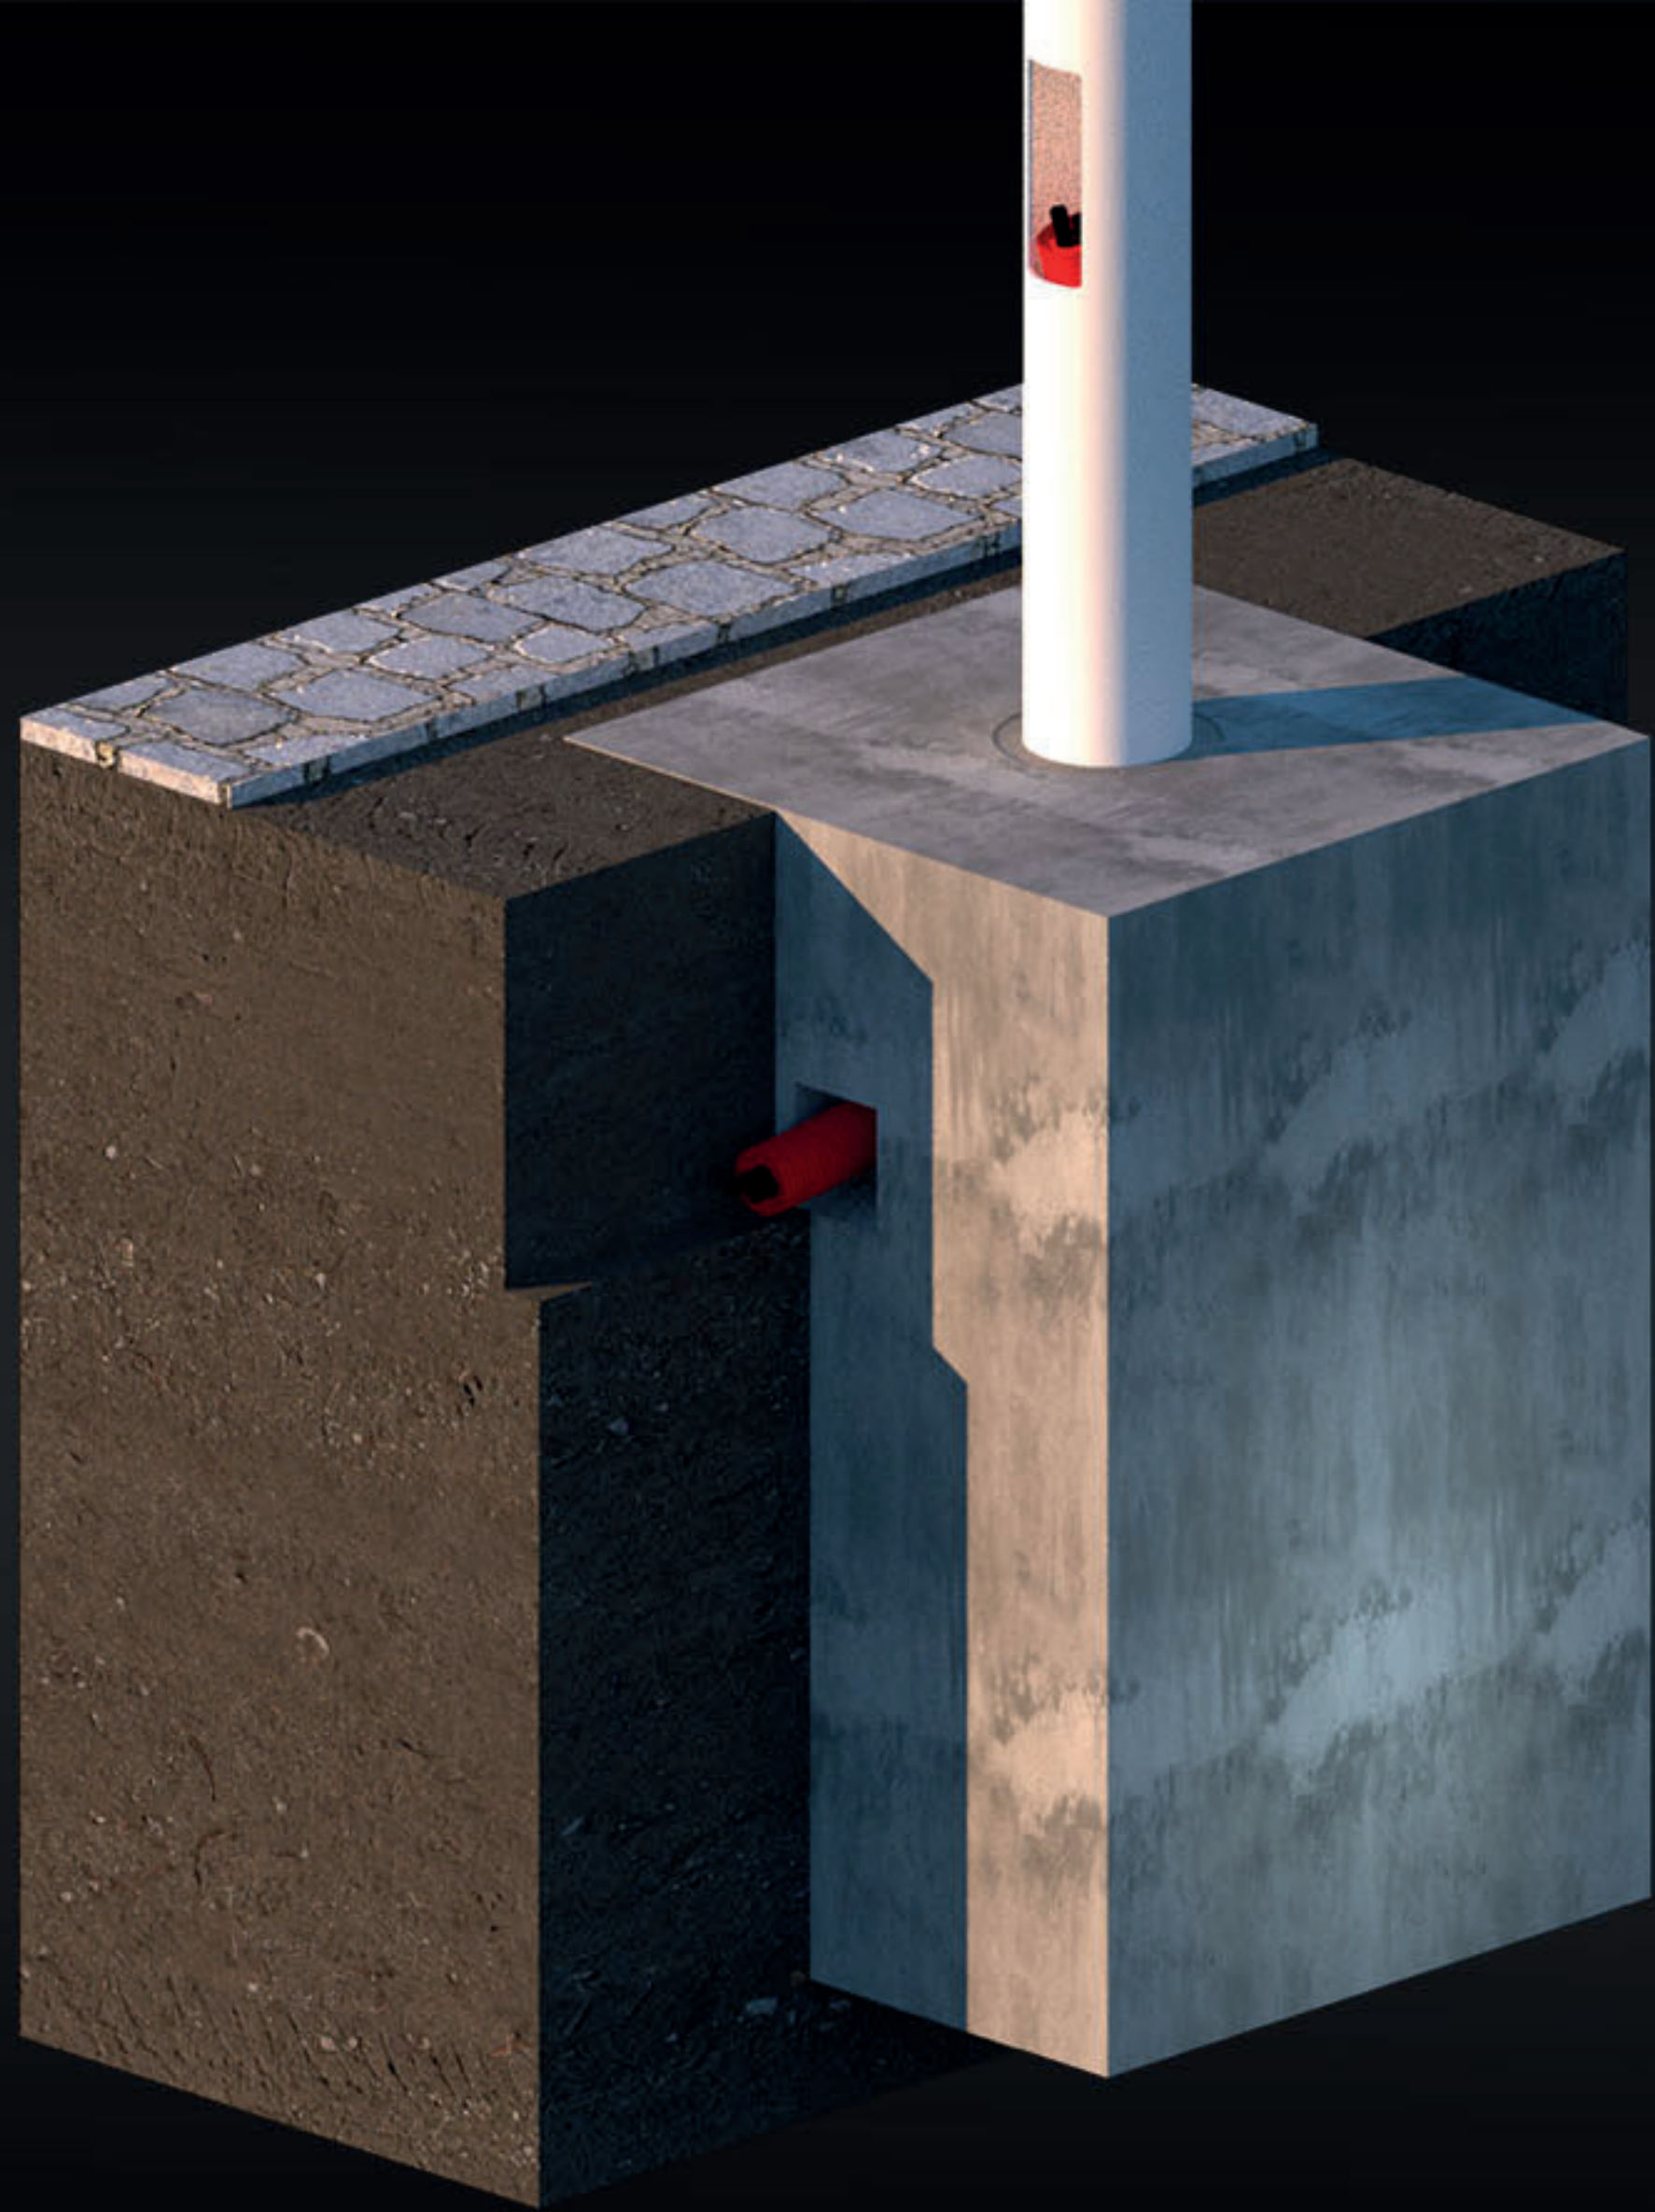

B



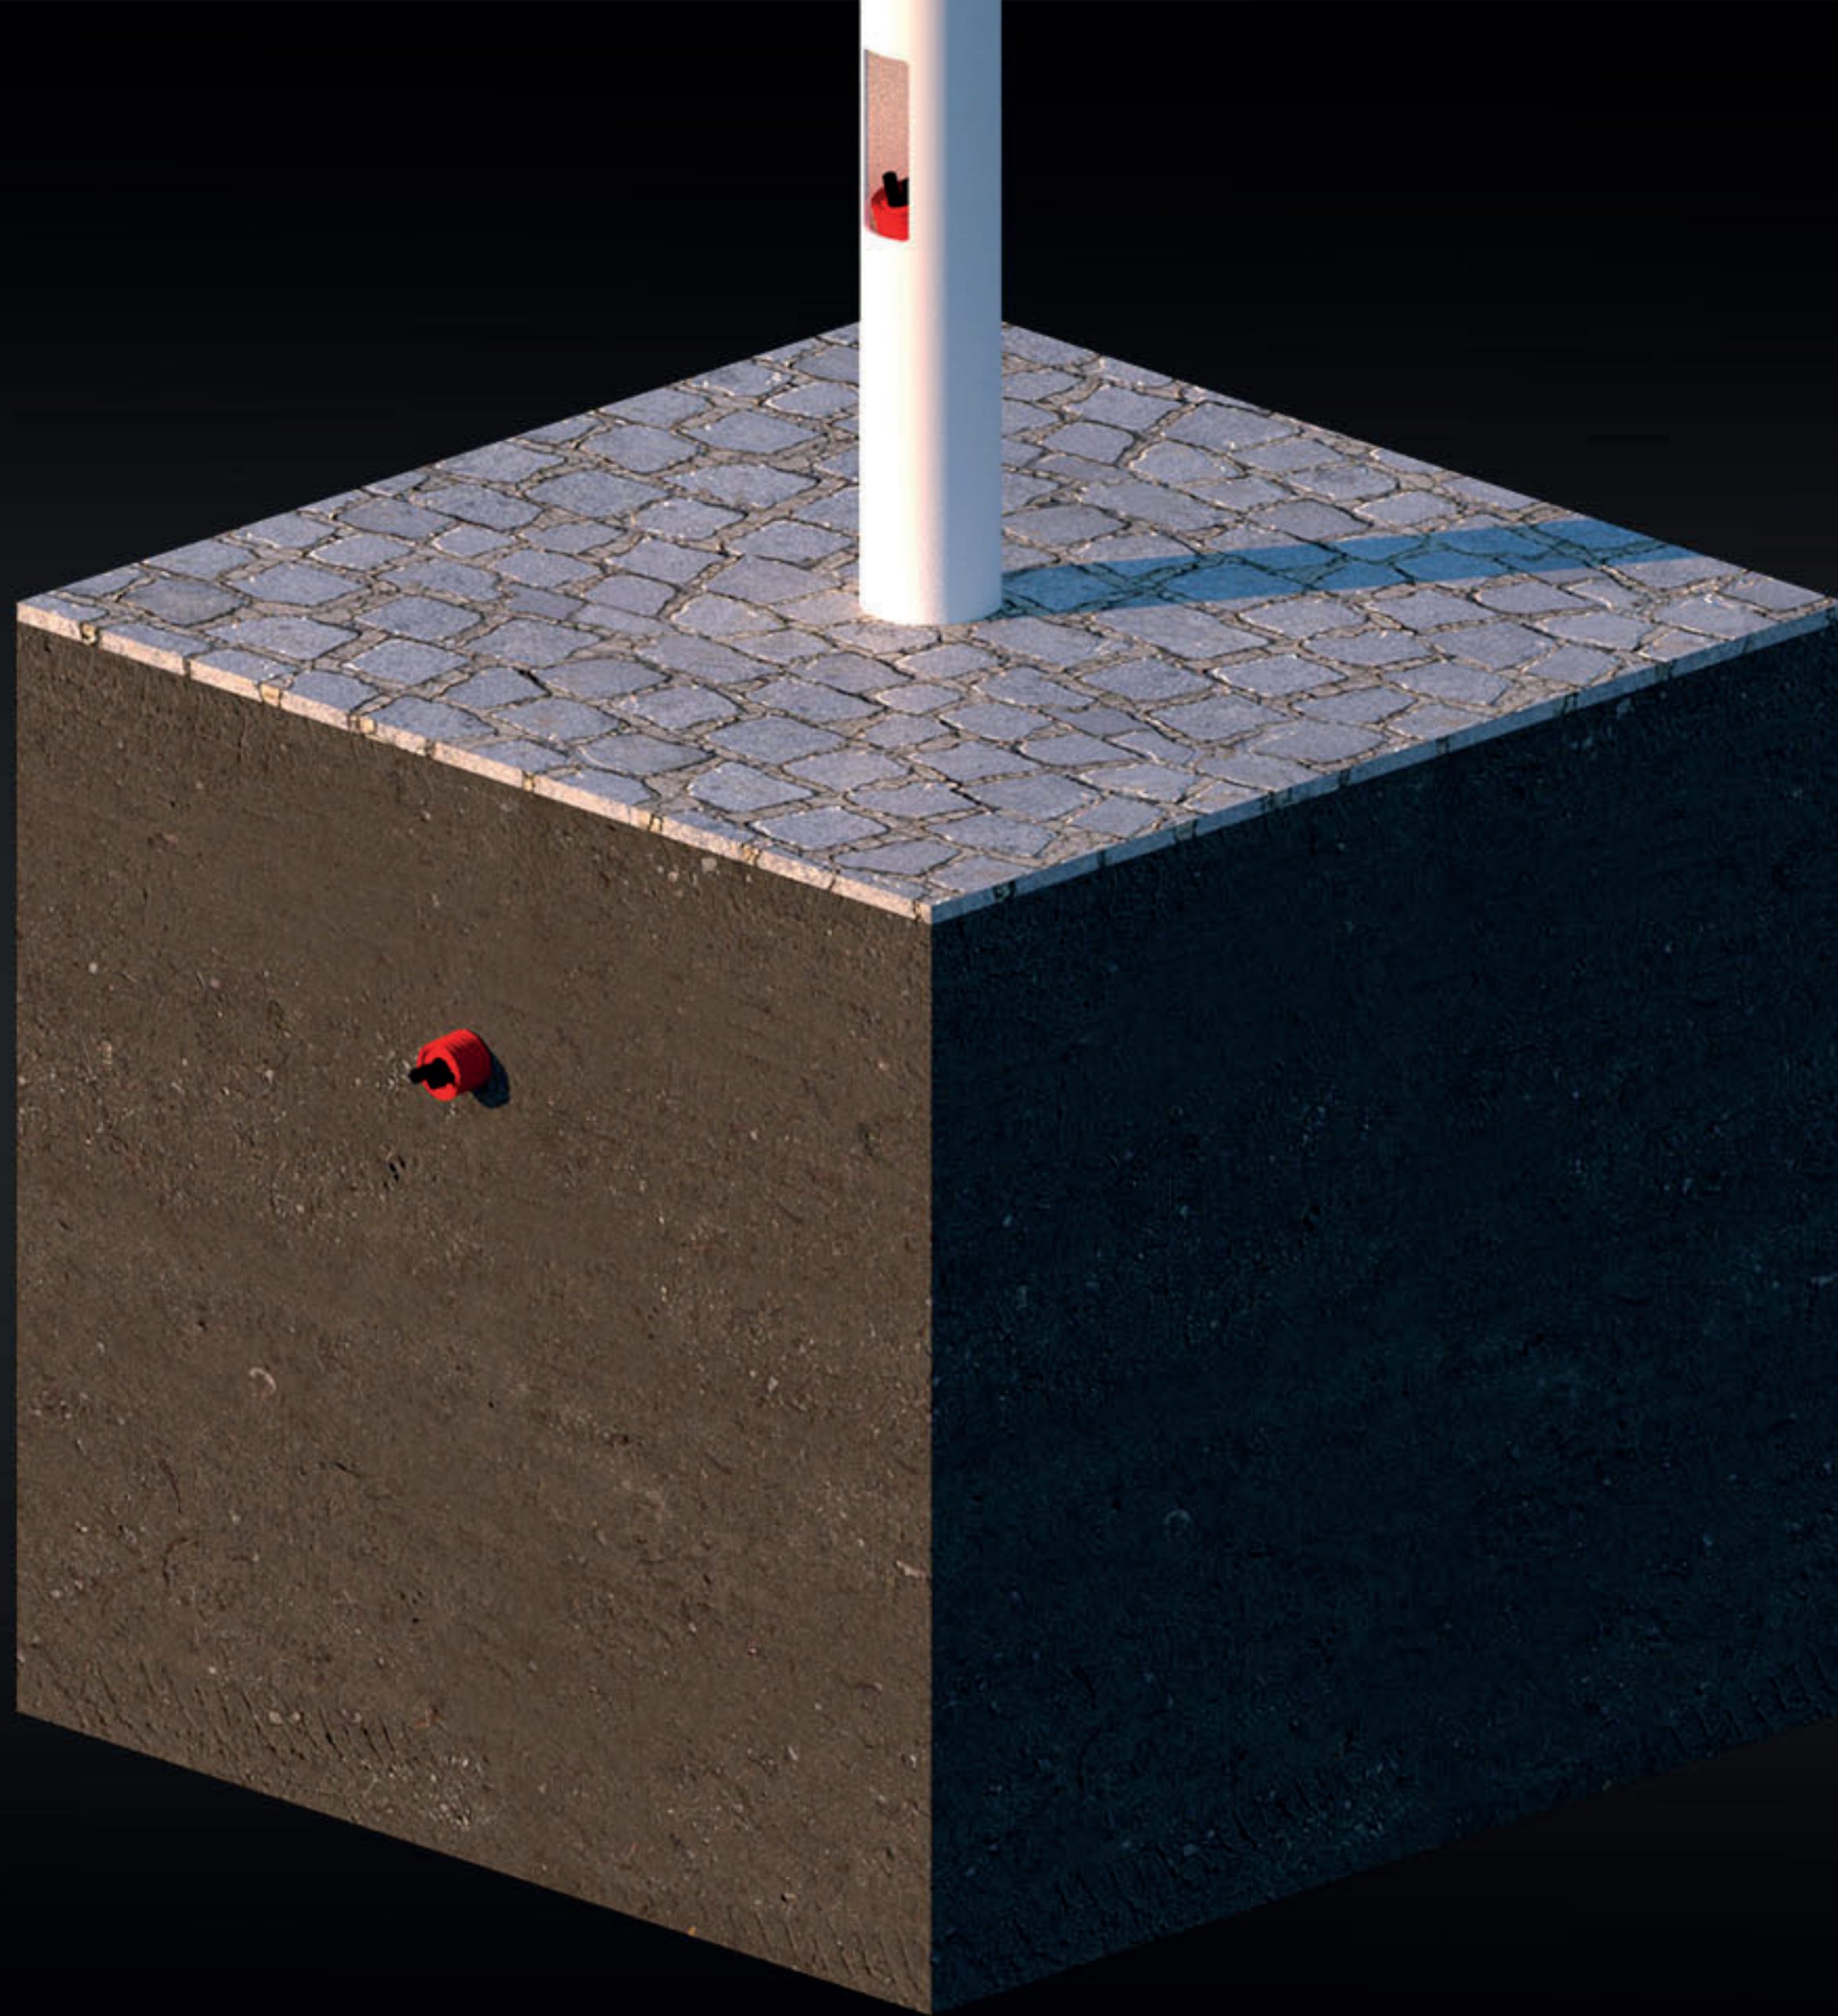


B



# Site ready for Lumitrix Installation Service

Lift or crane ready

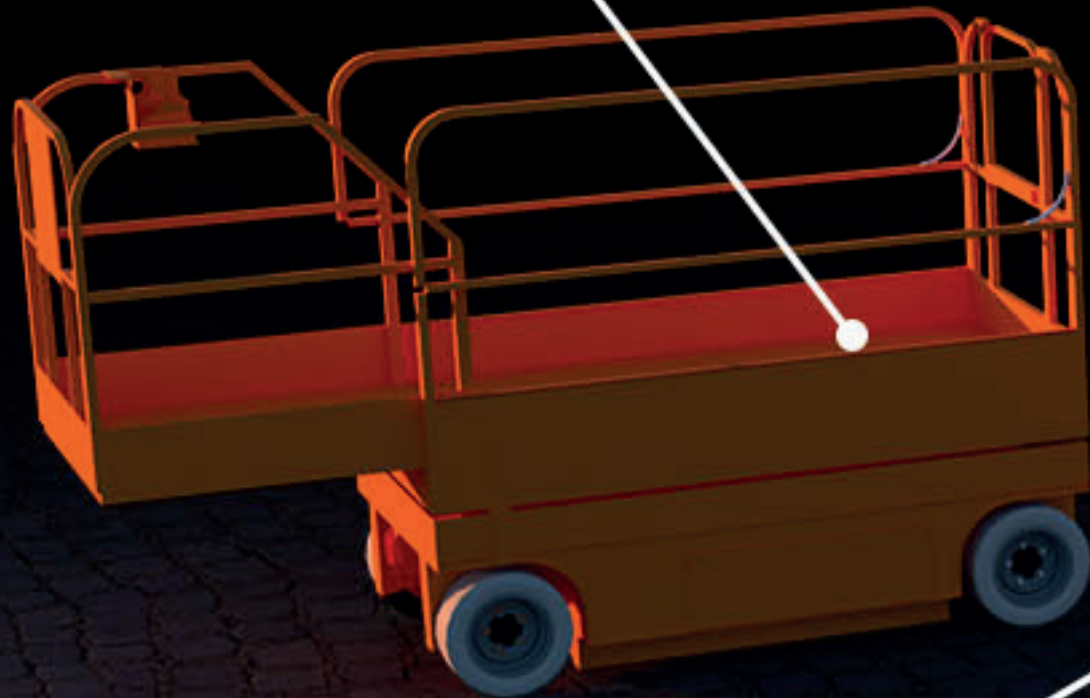

Main Column A or B securely installed in the ground with power ready (600 W per projector)



All Lumitrix products for the project ready



X-parts ready

